

**Sensitivities for 125mV output** (sufficient to give full output from any Leak power amplifier) at 1,000 c/s.


- Pickup (RIAA characteristic) 5mV
- Input impedance 70k-100k ohm
- Tuner 50mV
- Input impedance 70k-100k ohm
- Extra 50mV
- Input impedance 70k-100k ohm
- Microphone 3mV
- Input impedance 120k ohm
- Tape Head (CCIR characteristic) 4mV
- Input impedance 120k ohm

**Bass Control** :  $\pm 16$ db at 30 c/s.

**Treble Control** :  $\pm 14$ db at 20 kc/s.

**Distortion** :  
Less than 0.01% for 125mV output.

**Hum and Noise** :  
When plugged into any Leak power amplifier approximately 60db below full power output on Tuner and Extra, and 55db below on other inputs.

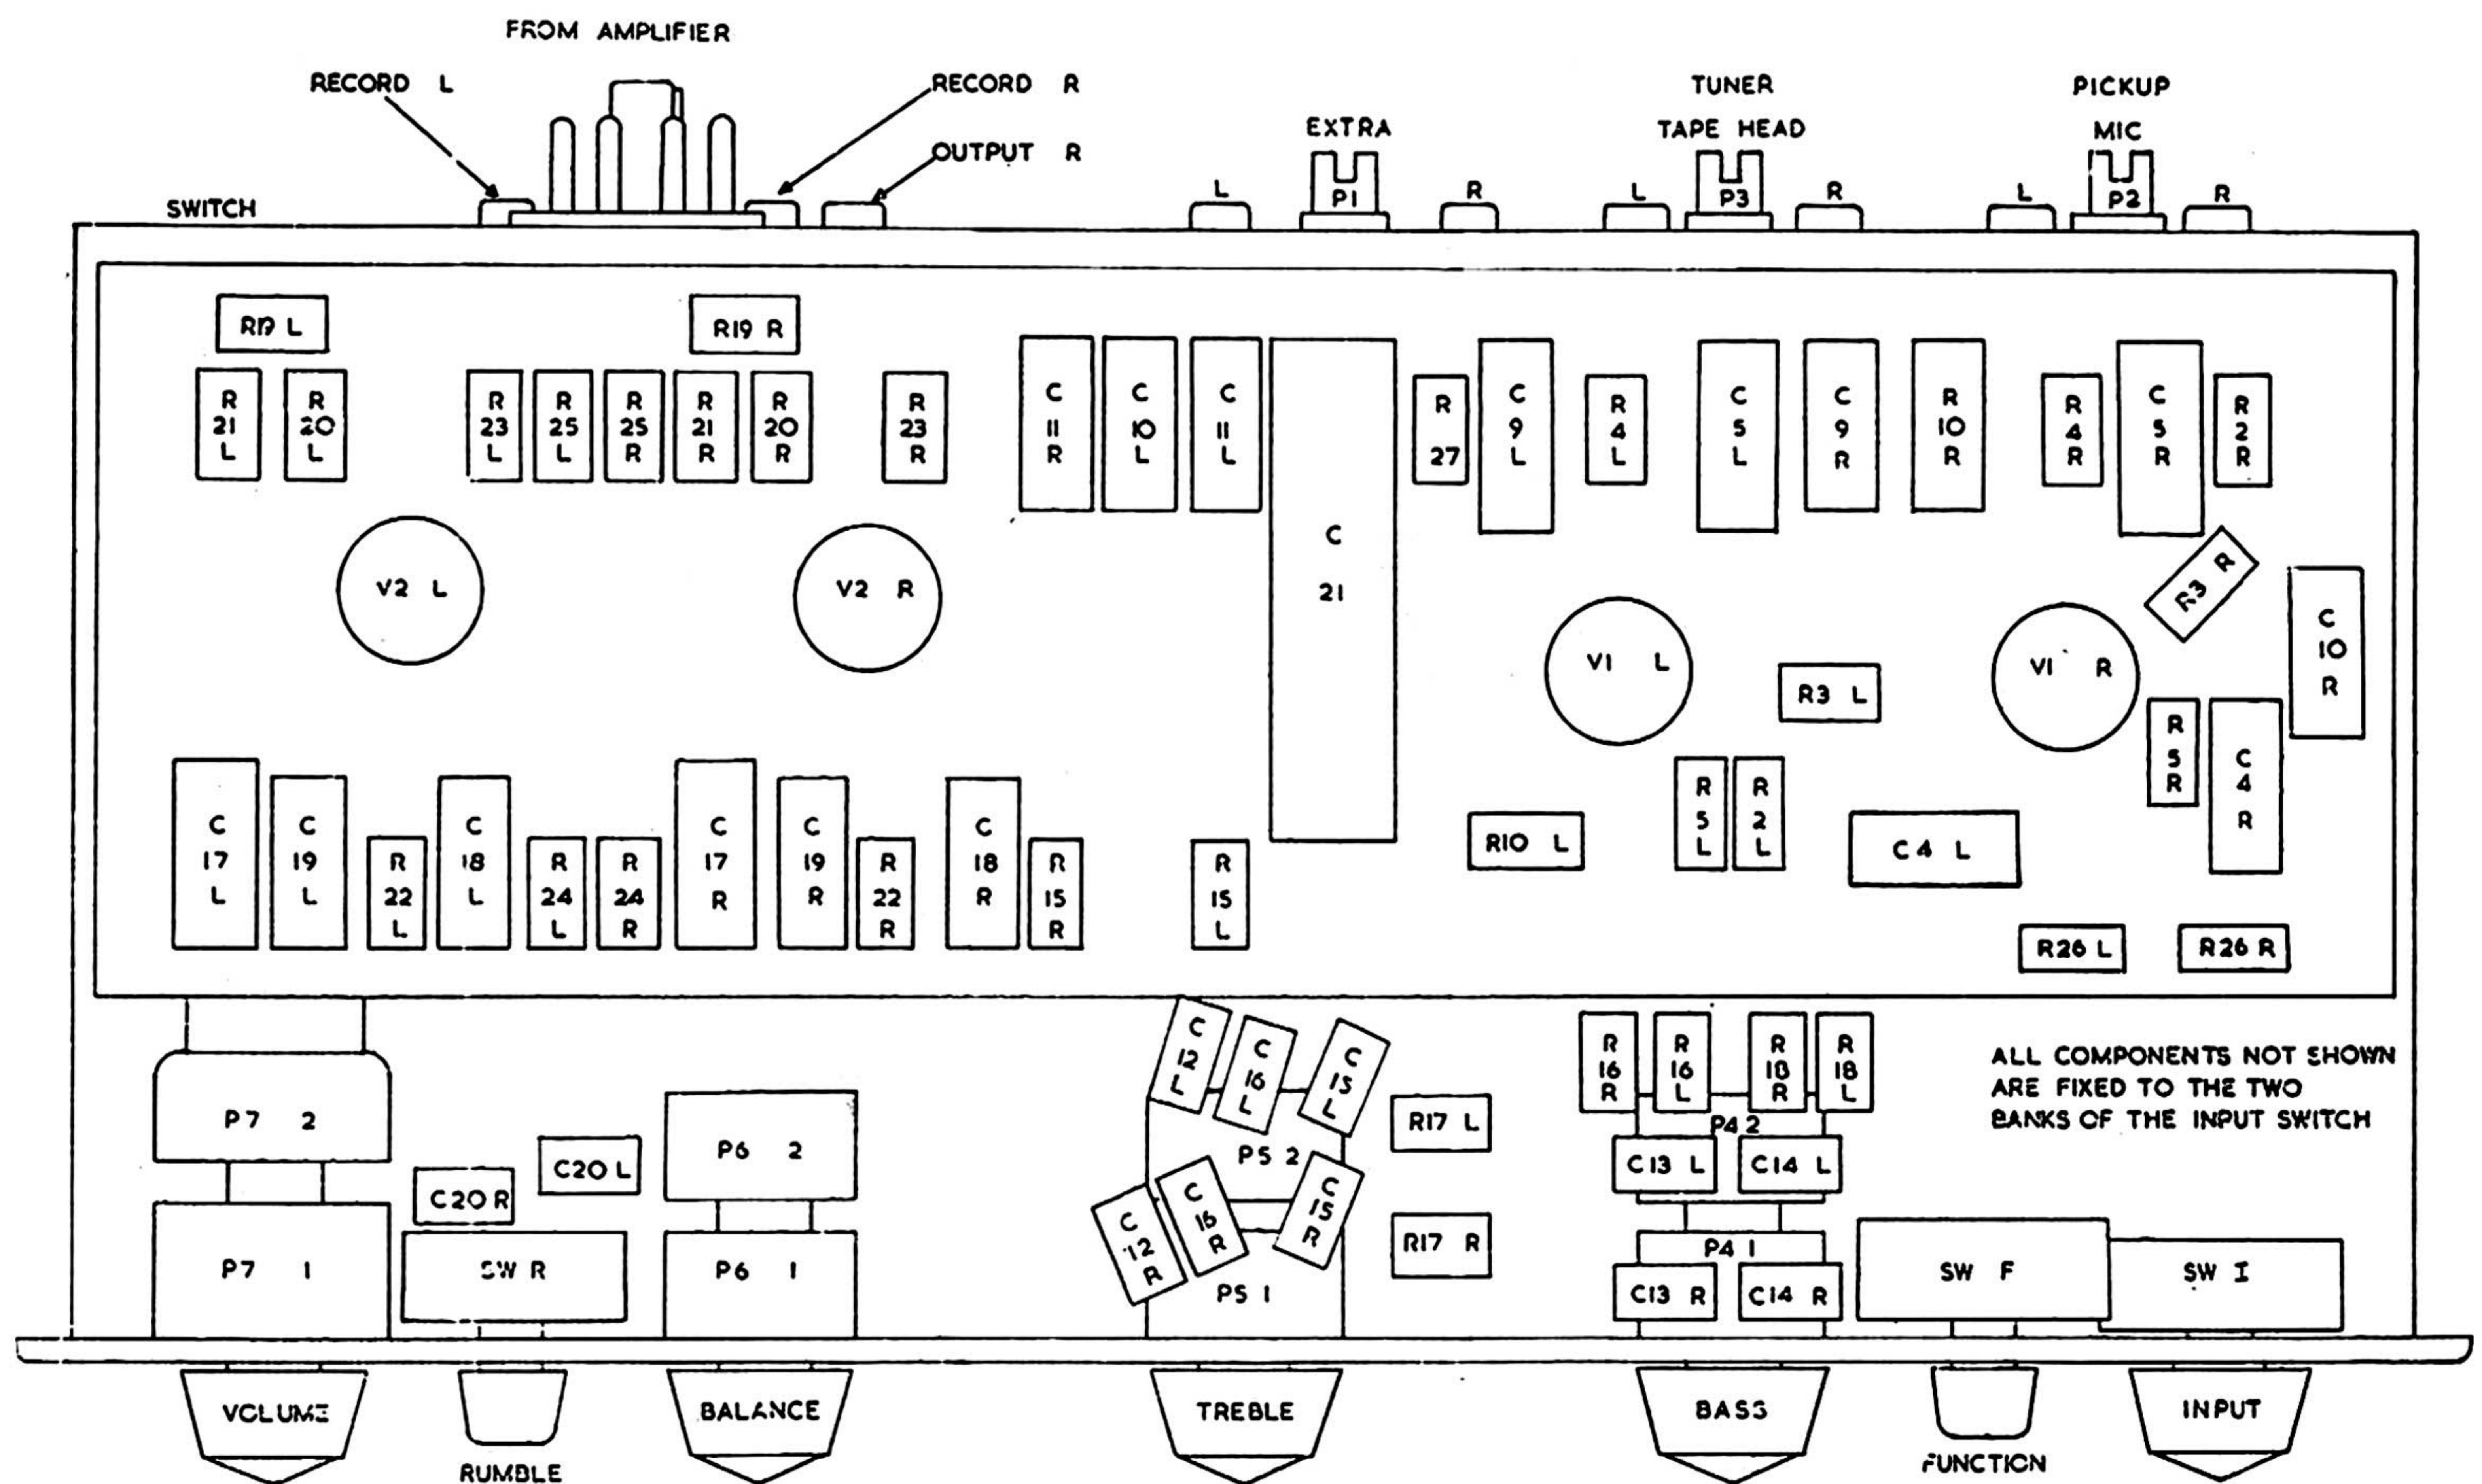

**H. J. LEAK & CO. LTD.**  
BRUNEL ROAD, WESTWAY FACTORY ESTATE,  
LONDON, W.3

Telephone:  
SHEpherds Bush 1173/4/5

Telegrams:  
Inland: Sinusoidal, Ealux, London  
Foreign: Sinusoidal, London