

DIRECT SUPPORT AND GENERAL SUPPORT MAINTENANCE

REPAIR PARTS AND SPECIAL TOOLS LIST

FOR

COUNTER, DIGITAL, TEKTRONIX, TYPE DC503AOPT01

APN MIS-30526/8

NSN 6695-01-202-6676

Current as of 19 March 1986

**REPORTING ERRORS AND RECOMMENDING IMPROVEMENTS**

You can help improve this manual. If you find any mistakes or if you know of a way to improve the procedures, please let us know. Mail your letter or DA Form 2028 (Recommended Changes to Publications and Blank Forms) to: Commander, U.S. Army TMDE Support Group, ATTN: AMXTM-LML, Redstone Arsenal, AL 35898-5400. A reply will be furnished directly to you.

TABLE OF CONTENTS

	Page
Section I. INTRODUCTION .....	1
Section II. REPAIR PARTS LIST .....	2-1
Group 0010 Counter, digital .....	2-1
0020 Printed wiring board .....	2-2
0030 Circuit card assembly .....	2-2
0040 Circuit card assembly .....	2-4
Section III. SPECIAL TOOLS LIST (Not applicable) .....	
Section IV. NATIONAL STOCK NUMBER AND PART NUMBER INDEX .....	I-1

**DIRECT SUPPORT AND GENERAL SUPPORT MAINTENANCE**

**REPAIR PARTS AND SPECIAL TOOLS LIST**

**SECTION I. INTRODUCTION**

**1. Scope.** This RPSTL lists and authorizes spares and repair parts required for performance of direct and general support maintenance of Counter, Digital, Tektronix, Type DC503AOPT01. It authorizes the requisitioning, issue, and disposition of spares and repair parts as indicated by the Source, Maintenance and Recoverability (SMR) codes.

**2. General.** In addition to this section I, Introduction, the Repair Parts and Special Tools List is divided into the following sections:

**a. Section II. Repair Parts List.** A list of spares and repair parts authorized by this RPSTL for use in the performance of maintenance. Parts lists are composed of functional groups in ascending numeric sequence. Parts are listed in alphabetical sequence within each figure number.


**b. Section III. Special Tools List.** Not applicable.

**c. Section IV. National Stock Number and Part Number Index.** A list, in National Item Identification Number (NIIN) sequence, of all National Stock Numbered (NSN) items appearing in the listing, followed by a list in alphanumeric sequence of all part numbers appearing in the listing. NSN's and part numbers are cross-referenced to the figure and item number appearance.

**3. Explanation of Columns (Section II)**

**a. Item No. (Column (1)).** Indicates the number used to identify each item appearing in the listing.

**b. SMR CODE (Column (2)).** The Source, Maintenance, and Recoverability (SMR) code is a 5-position code containing supply/requisitioning information, maintenance category authorization criteria, and disposition instructions as shown in the following breakdown:

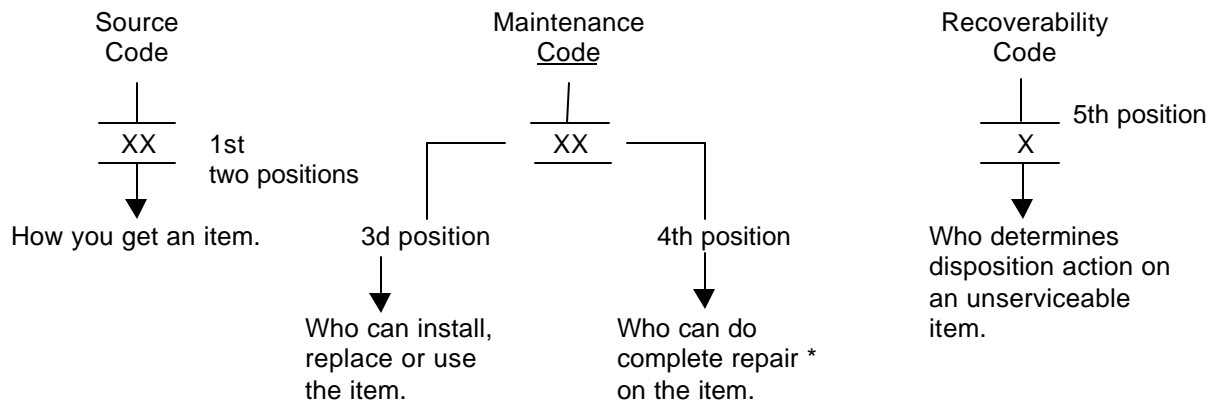

\*Complete Repair: Maintenance capacity, capability, and authority to perform all the corrective maintenance tasks of the "Repair" function in a use/user environment in order to restore serviceability to a failed item.

(1) **Source Code.** The source code tells you how you get an item needed for maintenance, repair, or overhaul of an end item/equipment. Source codes are always the first two positions of the SMR code. Explanation of source codes follows:

<b>Code</b>	<b>Explanation</b>
PA -	Stocked items use the applicable NSN to request/requisition items with this code. This item is authorized to the category indicated by the code entered in the 3d position of the SMR code.

(2) **Maintenance Code.** Maintenance codes tell you the level(s) of maintenance authorized to USE and REPAIR support items. The maintenance codes are entered in the third and fourth positions of the SMR code as follows:

(a) The maintenance code entered in the third position tells you the lowest maintenance level authorized to remove, replace, and use an item. The maintenance code entered in the third position will indicate authorization to the following level of maintenance.

<b>Code</b>	<b>Application/Explanation</b>
F	- Direct support level can remove, replace, and use the item.

(b) The maintenance code entered in the fourth position tells you whether or not the item is to be repaired and identifies the lowest maintenance level with the capability to do complete repair (i.e., perform all authorized repair functions). This position will contain one of the following codes.

<b>Code</b>	<b>Application/Explanation</b>
F	- Direct support is the lowest level that can do complete repair of the item.
Z	- Nonreparable. No repair is authorized.

(3) **Recoverability Code.** Recoverability codes are assigned to items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the SMR code as follows:

<b>Recoverability Codes</b>	<b>Definition</b>
Z	- Nonreparable item. When unserviceable, condemn and dispose of the item at the level of maintenance shown in the third position of the SMR code.
F	- Reparable item. When uneconomically reparable, condemn and dispose of the item at the direct support level.

## Recoverability Codes

## Definition

- A - Item requires special handling or condemnation procedures because of specific reasons (i.e., precious metal content, high dollar value, critical material, or hazardous material). Refer to appropriate manuals/directives for specific instructions.

**c. FSCM (Column (3)).** The Federal Supply Code for Manufacturer (FSCM) is a 5-digit numeric code which is used to identify the manufacturer, distributor, or Government agency, etc., that supplies the item.

**d. PART NUMBER (Column (4)).** Indicates the primary number used by the manufacturer (individual, company, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications standards, and inspection requirements to identify an item or range of items.

**NOTE:** When you use an NSN to requisition an item, the item you receive may have a different part number from the part ordered, but go ahead and use or furnish it as the replacement part.

**e. DESCRIPTION AND USABLE ON CODE (UOC) (Column (5)).** This column includes the following information:

- (1) The Federal item name and, when required, a minimum description to identify the item.
- (2) The usable on code, when applicable (see paragraph 5, Special Information).

**f. QTY (Column (6)).** The QTY (quantity per figure column) indicates the quantity of the item used in the parts list which is prepared for a functional group, subfunctional group, or an assembly.

## 4. Explanation of Columns (Section IV)

### a. NATIONAL STOCK NUMBER (NSN) INDEX

(1) **STOCK NUMBER column.** This column lists the NSN by National item identification number (NIIN) sequence. The NIIN consists of the last nine digits of the NSN

(i.e.,  $\frac{\text{NSN}}{\text{NIIN}}$  5305-01-674-1467). When using this column to locate an item, ignore the first 4 digits of the NSN. However, the complete NSN should be used when ordering items by stock number.

(2) **FIG. column.** Indicates the figure number used to identify each item appearing in the listing. The figures are in numerical order in Section II.

(3) **ITEM column.** The item number identifies the item associated with the figure listed in the adjacent FIG. column. This item is also identified by the NSN listed on the same line.

**b. PART NUMBER INDEX.** Part numbers in this index are listed by part number in ascending alphanumeric sequence (i.e., vertical arrangement of letter and number combination which places the first letter or digit of each group in order A through Z, followed by the numbers 0 through 9 and each following letter or digit in like order).

(1) **FSCM column.** The Federal Supply Code for Manufacturer (FSCM) is a 5-digit numeric code used to identify the manufacturer, distributor, or Government agency, etc., that supplies the item.

(2) **PART NUMBER column.** Indicates the primary number used by the manufacturer (individual, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications standards, and inspection requirements to identify an item or range of items.

(3) **STOCK NUMBER column.** This column lists the NSN for the associated part number and manufacturer identified in the PART NUMBER and FSCM columns to the left. The part number line entry (with NSN, when available) identifies the first figure/item number appearance for which the part number is applicable. The part number is not listed for additional figure/item number appearances identified by that part number.

(4) **FIG. column.** This column lists the number of the figure where the item is located in Section II.

(5) **ITEM column.** The item number is that number assigned to the item as it appears in the figure referenced in the adjacent figure number column.

## 5. Special Information

**a.** Repair parts for components of standards sets which can be identified as existing in the supply system will be requisitioned through normal supply channels from the appropriate supply commodity manager.

**b.** Repair parts for components of standards sets which cannot be identified as to proper supply source will be requisitioned from USAMICOM, using routing identifier B64 and furnishing, as a minimum, the following as exception data.

(1) Component stock number of the individual end item to be repaired.

(2) Component manufacturer's equipment model number and serial number.

(3) The equipment manufacturer's stock number as listed in the appropriate manual for the desired repair part.

(4) The repair part reference designation, circuit reference, circuit symbol schematic designation, or reference number as listed in the manufacturer's manual.

(5) The technical specification of the repair part as contained in the appropriate manufacturer's manual.

(6) The title and date of the manufacturer's manual from which the information in **a** and **b**(3), (4), and (5) above was taken.

**c.** For requisitioning miscellaneous consumable maintenance supplies or expendable supplies, use CTA 50-970.

d. The usable on code appears in the lower left corner of the Description column heading. Usable on codes are shown as "UOC" in the Description column (justified left) on the first line applicable item description/nomenclature.

e. This RPSTL does not contain illustrations for items listed in Section II, since the manufacturer's manuals contain exploded view illustrations which are adequate for repair parts location. Copies of the manufacturer's manual for Counter, Digital, Tektronix, Type DC503AOPT01 are furnished with the equipment for which this RPSTL is prepared. The figure and item numbers in the listing are for locating the item within this RPSTL.

## 6. How to Locate Repair Parts

### a. When National Stock Number or Part Number is Not Known.

(1) **First.** Refer to the parts list to locate the item by description. This list is listed in alphabetical sequence within each figure number.

(2) **Second.** After locating the item in the Repair Parts List, refer to the Part Number Index to find the NSN.

### b. When National Stock Number or Part Number is Known.

(1) **First.** Using the Index of National Stock Numbers and Part Numbers, find the pertinent National Stock Number or Part Number. The NSN index is in National Item Identification Number (NIIN) sequence. The part numbers in the Part Number index are listed in ascending alphanumeric sequence. Both indexes cross-reference you to the illustration figure and item number of the item you are looking for.

(2) **Second.** After finding the figure and item number, verify that the item is the one you're looking for, then locate the item number in the repair parts list for the figure.

7. **Abbreviations.** Not applicable.

SECTION II		REPAIR PARTS LIST			TM 9-6695-276-34P
(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODES (UOC)	QTY
				GROUP 0010 - FIGURE 1 COUNTER, DIGITAL DC503AOPT01 (80009) MIS-30526/8 (18876)	
10	PAFZZ	80009	105-0718-01	BAR, LATCH RELEASE.....	1
20	PAFZZ	80009	343-0499-13	BRACKET, ELECTRICAL.....	4
40	PAFFF	80009	670-6557-04	CIRCUIT CARD ASSEMB A12 FOR PARTS, SEE GROUP 0030, FIGURE 3.....	1
50	PAFFF	80009	670-6558-06	CIRCUIT CARD ASSEMB A14 FOR PARTS SEE GROUP 0040, FIGURE 4.....	1
60	PAFZZ	80009	352-0166-04	CONNECTOR.....	2
70	PAFZZ	80009	352-0166-05	CONNECTOR, BODY, PLUG.....	2
80	PAFZZ	80009	352-0165-03	CONNECTOR, BODY, PLUG.....	2
90	PAFZZ	80009	352-0161-02	CONNECTOR, BODY, PLUG.....	4
100	PAFZZ	80009	134-0499-10	CONNECTOR, RECEPTACL.....	1
110	PAFZZ	80009	131-0955-00	CONNECTOR, RECEPTACL.....	2
120	PAFZZ	80009	131-1343-00	CONTACT ASSEMBLY, EL.....	2
130	PAFZZ	80009	131-0781-00	CONTACT, ELECTRICAL.....	14
140	PAFZZ	22526	75060-012	CONTACT, ELECTRICAL.....	1
150	PAFZZ	80009	136-0252-07	CONTACT, ELECTRICAL.....	1
160	PAFZZ	80009	376-0029-00	COUPLING , SHAFT, RIGI.....	1
170	PAFZZ	07707	SE25	EYELET, METALLIC.....	4
180	PAFZZ	75915	102071	FUSEHOLDER, BLOCK.....	6
190	PAFZZ	80009	352-0169-00	HOLDER, TERMINAL CON.....	2
200	PAFZZ	80009	136-0387-00	JACK, TIP.....	5
210	PAFZZ	80009	366-1690-00	KNOB.....	1
220	PAFZZ	80009	366-0494-05	KNOB.....	1
230	PAFZZ	80009	105-0719-00	LATCH.....	1
240	PAFZZ	80009	175-1178-00	LEAD, TEST.....	2
250	PAFZZ	80009	210-0551-00	NUT, PLAIN, HEXAGON.....	1
260	PAFZZ	80009	210-0583-00	NUT, PLAIN, HEXAGON.....	1
270	PAFFF	80009	670-6556-01	PRINTED WIRING BOAR A10 FOR PARTS SEE GROUP 0020, FIGURE 2.....	1
280	PAFZZ	80009	366-1512-00	PUSH BUTTON.....	10
290	PAFZZ	80009	211-0097-00	SCREW, MACHINE.....	4
300	PAFZZ	83385	211-0012-00	SCREW, MACHINE.....	1
320	PAFZZ	80009	211-0008-00	SCREW, MACHINE.....	4
330	PAFZZ	80009	211-0101-00	SCREW, MACHINE.....	2
340	PAFZZ	80009	211-0244-00	SCREW, MACHINE.....	2
350	PAFZZ	96906	MS35206-212	SCREW, MACHINE.....	1
360	PAFZA	80009	136-0670-00	SOCKET, PLUG-IN ELEC.....	2
370	PAFZZ	80009	136-0260-02	SOCKET, PLUG-IN ELEC.....	54
380	PAFZA	80009	136-0623-00	SOCKET, PLUG-IN ELEC.....	2
400	PAFZZ	80009	136-0269-02	SOCKET, PLUG-IN ELEC.....	12
410	PAFZZ	73803	CS9002-8	SOCKET, PLUG-IN ELEC.....	3
430	PAFZZ	80009	214-1061-00	SPRING, FLAT.....	1
440	PAFZZ	80009	343-0495-04	SWITCH, CLIP.....	1
450	PAFZZ	80009	210-0255-00	TERMINAL, LUG.....	1
460	PAFZZ	49611	DF137A	WASHER.....	1

## SECTION II

TM 9-6695-276-34P

(1) ITEM NO	(2) SMR CODE	(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODES (UOC)	(6) QTY
470	PAFZZ	08484	AL1256-86	WASHER, FLAT.....	1
				GROUP 0020 - FIGURE 2 PRINTED WIRING BOARD 670-6556-01(80009)	
10	PAFZZ	22526	65500-136	CONNECTOR, RECEPTACL J1012, J1101 J1102.....	3
20	PAFZZ	07690	438267-01	MICROCIRCUIT, DIGITA CR1011 .....	1
30	PAFZZ	81349	RCR07G471JS	RESISTOR, FIXED, COMP R1009, R1011, R1012.....	3
40	PAFZZ	80009	150-1036-00	SEMICONDUCTOR DEVIC CR1012, CR1111, CR1211, CR2151, CR1311 .....	5
				GROUP 0030 - FIGURE 3 CIRCUIT CARD ASSEMBLY 670-6557-04 (80009)	
10	PAFZZ	72982	8005H9AADW5R103K	CAPACITOR, FIXED, CER C1030, C1035.....	2
20	PAFZZ	72982	8005H9AABZ5U104M	CAPACITOR, FIXED, CER C1120, C1130, C1200, C1202, C1220, C1230, C1310, C1131, C1330, C1400, C1420, C1430, C1510, C1519, C1520, C1523, C1530, C1532, C1600, C1622, C1629, C1630, C1631, C1733 .....	24
30	PAFZZ	72982	374-005COG1389F	CAPACITOR, FIXED, CER C1731.....	1
40	PAFZZ	72982	301-000COG470F	CAPACITOR, FIXED, CER C1730.....	1
50	PAFZZ	81349	CCR06CG102GS	CAPACITOR, FIXED, CER C1720.....	1
60	PAFZZ	72982	390049X5P0680K	CAPACITOR, FIXED, CER C1522.....	1
70	PAFZZ	72982	390049X5P0470K	CAPACITOR, FIXED, CER C1522.....	1
80	PAFZZ	80009	290-0804-00	CAPACITOR, FIXED, ELE C1533, C1632.....	2
90	PAFZZ	56289	503D475F035KA	CAPACITOR, FIXED, ELE C1231, C1232.....	2
100	PAFZZ	22526	47357	CONTACT, ELECTRICAL J1519, J1530, J1630, J1730.....	8
120	PAFZZ	28480	8159-0005	LEAD, ELECTRICAL W1320, W1322.....	2
130	PAFZZ	81349	M38510/06101BEB	MICROCIRCUIT, DIGITA 71120, U1121, U1310, U1321, U1420, U1411 .....	6
140	PAFZZ	97942	581R688H06	MICROCIRCUIT, DIGITA U1220, U1320, U1330, U1420, U1430.....	5
150	PAFZZ	03538	7844958	MICROCIRCUIT, DIGITA U1221.....	1
160	PAFZZ	81349	M38510/06003BEB	MICROCIRCUIT, DIGITA U1300.....	1
170	PAFZZ	80009	156-0472-03	MICROCIRCUIT, DIGITA U1500.....	1
180	PAFZZ	81349	M38510/07009BEB	MICROCIRCUIT, DIGITA U1500.....	1
190	PAFZZ	81349	M38510/30001BCB	MICROCIRCUIT, DIGITA U1510, U1511.....	2
200	PAFZZ	80009	156-0369-00	MICROCIRCUIT, DIGITA U1530.....	1
210	PAFZZ	94033	600A91	MICROCIRCUIT, DIGITA R1224.....	1
220	PAFZZ	81349	M38510/11201BCB	MICROCIRCUIT, LINEAR U1122 .....	1
230	PAFZZ	80009	156-1149-00	MICROCIRCUIT, LINEAR U1620.....	1
240	PAFZZ	80009	263-0010-00	PUSH BUTTON S1720, S1730, S1731, S1732	4
250	PAFZZ	81349	RCR07G391JS	RESISTOR, FIXED, COMP R1720.....	1
260	PAFZZ	81349	RCR07G432JS	RESISTOR, FIXED, COMP R1637.....	1



## SECTION II

TM 9-6695-276-34P

(1) ITEM NO	(2) SMR CODE	(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODES (UOC)	(6) QTY
270	PAFZZ	81349	RCR07G154JS	RESISTOR, FIXED, COMP R1629.....	1
280	PAFZZ	81349	RCR07G474JS	RESISTOR, FIXED, COMP R1623.....	1
290	PAFZZ	81349	RCR07G302JS	RESISTOR, FIXED, COMP R1215, R1621.....	2
300	PAFZZ	81349	RCR07G221JS	RESISTOR, FIXED, COMP R1538, R1539.....	2
310	PAFZZ	81349	RCR07G122JS	RESISTOR, FIXED, COMP R1534, R1535, R1634, R1635 .....	4
320	PAFZZ	81349	RCR075G61JS	RESISTOR, FIXED, COMP R1523, R1531, R1532, R1533, R1536, R1537 .....	6
330	PAFZZ	81349	RCR07G820JS	RESISTOR, FIXED, COMP R1431, R1520, R1530 .....	3
340	PAFZZ	81349	RCR07G510JS	RESISTOR, FIXED, COMP R1430, R1521, R1731 .....	3
350	PAFZZ	81349	RCR07G472JS	RESISTOR, FIXED, COMP R1331, R1332, R1333, R1334, R1625, R1626 .....	6
360	PAFZZ	81349	RCR07G101JS	RESISTOR, FIXED, COMP R1312, R1524.....	2
370	PAFZZ	81349	RCR07G102JS	RESISTOR, FIXED, COMP R1304, R1620, R1730 .....	3
380	PAFZZ	81349	RCR07G331JS	RESISTOR, FIXED, COMP R1231.....	1
390	PAFZZ	81349	RCR07G750JS	RESISTOR, FIXED, COMP R1230, R1300.....	2
410	PAFZZ	81349	RCR07G162JS	RESISTOR, FIXED, COMP R1211, R1303.....	2
420	PAFZZ	81349	RCR07G121JS	RESISTOR, FIXED, COMP R1200, R1530.....	2
430	PAFZZ	81349	RCR07G301JS	RESISTOR, FIXED, COMP R1138, R1301.....	2
440	PAFZZ	81349	RCR07G103JS	RESISTOR, FIXED, COMP R1311, R1132 R1133, R1134 .....	4
450	PAFZZ	81349	RCR07G151JS	RESISTOR, FIXED, COMP R1130, R1336.....	2
460	PAFZZ	81349	RCR07G132JS	RESISTOR, FIXED, COMP R1037.....	1
470	PAFZZ	81349	RCR07G362JS	RESISTOR, FIXED, COMP R1036.....	1
480	PAFZZ	81349	RCR07G681JS	RESISTOR, FIXED, COMP R1035.....	1
490	PAFZZ	81349	RCR07G361JS	RESISTOR, FIXED, COMP R1033.....	1
500	PAFZZ	81349	RCR07G751JS	RESISTOR, FIXED, COMP R1032, R1210, R1302 .....	3
510	PAFZZ	81349	RCR07G241JS	RESISTOR, FIXED, COMP R1031.....	1
520	PAFZZ	81349	RCR07G511JS	RESISTOR, FIXED, COMP R1024.....	1
530	PAFZZ	81349	RCR07G470JS	RESISTOR, FIXED, COMP R510 .....	1
540	PAFZZ	81349	RCR07G202JS	RESISTOR, FIXED, COMP R1636.....	1
550	PAFZZ	81349	RCR07G131JS	RESISTOR, FIXED, COMP R1630, R1631.....	2
560	PAFZZ	81349	RNC55K8063FS	RESISTOR, FIXED, FILM R1633 .....	1
570	PAFZZ	81349	RNC55K2493FS	RESISTOR, FIXED, FILM R1632 .....	1
580	PAFZZ	81349	RNC60K1211FS	RESISTOR, FIXED, FILM R1624 .....	1
590	PAFZZ	81349	RNC60K2001FS	RESISTOR, FIXED, FILM R1624 .....	1
600	PAFZZ	81349	RNC55H1004FS	RESISTOR, FIXED, FILM R1628 .....	1
610	PAFZZ	81349	RCR07G680JS	RESISTOR, FIXED, COMP R1627.....	1
620	PAFZZ	32997	4308R-101-202	RESISTOR NETWORK, FI R1610 .....	1
630	PAFZZ	80009	311-1559-00	RESISTOR, VARIABLE, N R1525.....	1
650	PAFZZ	03508	DE140	SEMICONDUCTOR DEVIC R1720, R1721.....	2
670	PAFZZ	80009	152-0075-00	SEMICONDUCTOR DEVIC CR1320.....	1
680	PAFZZ	74063	60104-004	SEMICONDUCTOR DEVIC CR1210.....	1
690	PAFZZ	15818	CD8220	SEMICONDUCTOR DEVIC CR1021, CR1220, CR1222, CR1430, CR1620, CR1621, CR1630 .....	7
700	PAFZZ	22526	65521-136	TERMINAL BOARD J1020 .....	1
710	PAFZZ	80009	120-0382-00	TRANSFORMER, RADIO F L1530, L1630 .....	2
720	PAFZZ	80131	2N4249	TRANSISTOR Q1030.....	1

## SECTION II

TM 9-6695-276-34P

(1) ITEM NO	(2) SMR CODE	(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODES (UOC)	(6) QTY
730	PAFZZ	80131	2N3565	TRANSISTOR Q1032.....	1
740	PAFZZ	34148	S036228	TRANSISTOR Q1132, Q1133, Q1134, Q1300, Q1320, Q1321, Q1330, Q1331, Q1420, Q1530.....	10
750	PAFZZ	80009	151-0427-00	TRANSISTOR Q1620.....	1
760	PAFZZ	80009	151-0462-00	TRANSISTOR Q1020.....	1
GROUP 0040 - FIGURE 4 CIRCUIT CARD ASSEMBLY 670-6558-06 (80009)					
20	PAFZZ	72982	301-000COG470F	CAPACITOR, FIXED, CER C1130.....	1
30	PAFZZ	72982	374-005COG1389F	CAPACITOR, FIXED, CER Q1131.....	1
40	PAFZZ	72982	8005H9AABZ5U104M	CAPACITOR, FIXED, CER C1133, C1220, C1221, C1230, C1231, C1233, C1320, C1323, C1330, C1331, C1410, C1420, C1421, C1601, C1610, C1700, C1702, C1713, C1714, C1731, C1732 .....	21
50	PAFZZ	80009	290-0804-00	CAPACITOR, FIXED, ELE C1232, C1332, C1430, C1730 .....	4
60	PAFZZ	72982	390049X5P0680K	CAPACITOR, FIXED, CER C1322.....	1
70	PAFZZ	72982	390049X5P0470K	CAPACITOR, FIXED, CER C1322.....	1
80	PAFZZ	72982	8005H9AADW5R472K	CAPACITOR, FIXED, CER C1411, C1431, C1510.....	3
90	PAFZZ	80009	281-0852-00	CAPACITOR, FIXED, CER C1431.....	1
100	PAFZZ	81349	M39014/05-2237	CAPACITOR, FIXED, CER C1511, C1830.....	2
120	PAFZZ	80009	281-0630-00	CAPACITOR, FIXED, CER C1710, C1711.....	2
130	PAFZZ	80009	281-0564-00	CAPACITOR, FIXED, CER C1712.....	1
140	PAFZZ	72982	800SH9AADW5R103K	CAPACITOR, FIXED, CER C1820.....	1
150	PAFZZ	56289	503D475F035KA	CAPACITOR, FIXED, ELE C1400.....	1
160	PAFZZ	56289	VL1770	CAPACITOR, FIXED, ELE C1600.....	1
180	PAFZZ	56289	503D476F016MB	CAPACITOR, FIXED, ELE C1733.....	1
190	PAFZZ	74970	187-0106-005	CAPACITOR, VARIABLE, C1715.....	1
200	PAFZZ	80009	108-0422-00	COIL, FIXED L1600 .....	1
210	PAFZZ	29436	CA3120-4	CONTACT, ELECTRICAL J1520, J1521 .....	2
220	PAFZZ	22526	47357	CONTACT, ELECTRICAL J1130, J1230, J1300, J1400, J1500, J1710, J1720, J1810, J1820.....	40
230	PAFZZ	81349	F02A250V3A	FUSE, CARTRIDGE F1830.....	1
240	PAFZZ	81349	F02A250V1/2A	FUSE, CARTRIDGE F1820, 1821.....	2
250	PAFZZ	80009	156-0369-00	MICROCIRCUIT, DIGITA U1330.....	1
260	PAFZZ	80009	156-0383-02	MICROCIRCUIT, DIGITA U1420.....	1
270	PAFZZ	81349	M38510/30001BCB	MICROCIRCUIT, DIGITA U1422.....	1
280	PAFZZ	80009	156-0385-02	MICROCIRCUIT, DIGITA U1621.....	1
290	PAFZZ	80009	156-1161-00	MICROCIRCUIT, LINEAR U1800.....	1
300	PAFZZ	80009	156-0285-00	MICROCIRCUIT, LINEAR U1830.....	1
310	PAFZZ	81349	438510/10201BCB	MICROCIRCUIT, LINEAR U1831.....	1
320	PAFZZ	16331	63A133445P70	MICROCIRCUIT, LINEAR U1831.....	1
330	PAFZZ	80009	156-1149-00	MICROCIRCUIT, LINEAR U1220.....	1
340	PAFZZ	80009	263-0010-00	PUSH BUTTON S1020, S1021, S1030, S1031	4
350	PAFZZ	80009	148-0076-00	RELAY, REED K1800, K1810.....	2
360	PAFZZ	81349	RCR07G123JS	RESISTOR, FIXED, COMP R1530.....	1

## SECTION II

TM 9-6695-276-34P

(1) ITEM NO	(2) SMR CODE	(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODES (UOC)	(6) QTY
370	PAFZZ	81349	RCR07G273JS	RESISTOR, FIXED, COMP R1401.....	1
380	PAFZZ	81349	RCR07G221JS	RESISTOR, FIXED, COMP R1334, R1335.....	2
390	PAFZZ	81349	RCR07G820JS	RESISTOR, FIXED, COMP R1326.....	1
400	PAFZZ	81349	RCR07G121JS	RESISTOR, FIXED, COMP R1800.....	1
410	PAFZZ	81349	RCR07G561JS	RESISTOR, FIXED, COMP R1324, R1325, R1330, R1331, R1332, R1333.....	6
420	PAFZZ	81349	RCR07G101JS	RESISTOR, FIXED, COMP R1323, R1400, R1822.....	3
430	PAFZZ	81349	RCR07G470JS	RESISTOR, FIXED, COMP R1134, R1500, R1501, R1502, R1503, R1504, R1505, R1506, R1507.....	9
440	PAFZZ	81349	RCR07G102JS	RESISTOR, FIXED, COMP R1100, R1130, R1301, R1302, R1303, R1322, R1520, R1620, R1710, R1724, R1823, R1828.....	12
450	PAFZZ	81349	RCR07G512JS	RESISTOR, FIXED, COMP R1110, R1210, R1212, R1304, R1421, R1509, R1531.....	7
460	PAFZZ	81349	RCR07G391JS	RESISTOR, FIXED, COMP R1120.....	1
470	PAFZZ	81349	RCR07G510JS	RESISTOR, FIXED, COMP R1132.....	1
480	PAFZZ	81349	RCR07G151JS	RESISTOR, FIXED, COMP R1134, R1319.....	2
490	PAFZZ	81349	RCR07G472JS	RESISTOR, FIXED, COMP.....	4
500	PAFZZ	81349	RCR07G302JS	RESISTOR, FIXED, COMP R1221, R1339.....	2
510	PAFZZ	81349	RCR07G474JS	RESISTOR, FIXED, COMP R1223.....	1
520	PAFZZ	81349	RCR07G154JS	RESISTOR, FIXED, COMP R1226.....	1
530	PAFZZ	81349	RCR07G432JS	RESISTOR, FIXED, COMP R1233.....	1
540	PAFZZ	81349	RCR07G181JS	RESISTOR, FIXED, COMP R1712, R1735.....	2
550	PAFZZ	81349	RCR07G111JS	RESISTOR, FIXED, COMP R1714.....	1
560	PAFZZ	81349	RCR07G362JS	RESISTOR, FIXED, COMP R1723.....	1
570	PAFZZ	81349	RCR07G241JS	RESISTOR, FIXED, COMP R1725.....	1
580	PAFZZ	81349	RCR07G821JS	RESISTOR, FIXED, COMP R1731.....	1
590	PAFZZ	81349	RCR07G271JS	RESISTOR, FIXED, COMP R1732.....	1
600	PAFZZ	81349	RCR07G162JS	RESISTOR, FIXED, COMP R1734.....	1
610	PAFZZ	81349	RCR07G131JS	RESISTOR, FIXED, COMP R1231, R1236.....	2
620	PAFZZ	81349	RCR07G132JS	RESISTOR, FIXED, COMP R1820.....	1
630	PAFZZ	81349	RCR07G122JS	RESISTOR, FIXED, COMP R1234, R1235, R1336, R1337, R1702, R1713.....	6
640	PAFZZ	81349	RCR07G152JS	RESISTOR, FIXED, COMP R1508, R1821.....	2
650	PAFZZ	81349	RCR07G393JS	RESISTOR, FIXED, COMP R1511.....	1
660	PAFZZ	81349	RCR07G153JS	RESISTOR, FIXED, COMP R1531, R1701.....	2
670	PAFZZ	81349	RCR07G103JS	RESISTOR, FIXED, COMP R1610, R1700.....	2
680	PAFZZ	81349	RCR07G471JS	RESISTOR, FIXED, COMP R1614, R1720.....	2
690	PAFZZ	81349	RCR07G272JS	RESISTOR, FIXED, COMP R1622, R1623, R1624, R1715.....	4
700	PAFZZ	81349	RCR07G562JS	RESISTOR, FIXED, COMP R1711.....	1
710	PAFZZ	81349	RCR07G202JS	RESISTOR, FIXED, COMP R1232.....	1
720	PAFZZ	81349	RCR07G680JS	RESISTOR, FIXED, COMP.....	1
730	PAFZZ	81349	RNC60K1211FS	RESISTOR, FIXED, FILM R1320.....	2
740	PAFZZ	81349	RNC60K2001FS	RESISTOR, FIXED, FILM R1320.....	2
750	PAFZZ	81349	RNC55K2003FS	RESISTOR, FIXED, FILM R1321.....	1
770	PAFZZ	81349	RNC55K8063FS	RESISTOR, FIXED, FILM R1230.....	1
780	PAFZZ	81349	RNC55K2493FS	RESISTOR, FIXED, FILM R1225.....	1
790	PAFZZ	81349	RNC56K4991FS	RESISTOR, FIXED, FILM R1825, R1827.....	2
810	PAFZZ	81349	RNC55K1210FS	RESISTOR, FIXED, FILM R1801.....	1

## SECTION II

TM 9-6695-276-34P

(1) ITEM NO	(2) SMR CODE	(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODES (UOC)	(6) QTY
820	PAFZZ	81349	RNC55K8451FS	RESISTOR, FIXED, FILM R1730.....	1
830	PAFZZ	81349	RNC55H1004FS	RESISTOR, FIXED, FILM R1222.....	1
840	PAFZZ	80009	315-0200-00	RESISTOR, FIXED, WIRE R1300.....	1
850	PAFZZ	81349	RWR80SR301FS	RESISTOR, FIXED, WIRE R1733.....	1
860	PAFZZ	80009	307-0502-00	RESISTOR NETWORK, FI R1213.....	1
880	PAFZZ	22903	4014200-08	RESISTOR NETWORK, FI R1513.....	1
900	PAFZZ	80009	311-1559-00	RESISTOR, VARIABLE, N R1420.....	1
910	PAFZZ	74063	60104-004	SEMICONDUCTOR DEVIC CR1730, CR1732, CR1733.....	3
920	PAFZZ	03508	DE140	SEMICONDUCTOR DEVIC CR1120, CR1121.....	2
930	PAFZZ	15818	CD8220	SEMICONDUCTOR DEVIC CR1220, CR1221, CR1230, CR1700, CR1721, C1731, CR1810, CR1811.....	8
940	PAFZZ	80009	152-0149-00	SEMICONDUCTOR DEVIC VR1710.....	1
950	PAFZZ	80009	120-0382-00	TRANSFORMER, RADIO F L1230, L1330.....	2
960	PAFZZ	81413	200803-001	TRANSISTOR Q1300.....	1
970	PAFZZ	80009	151-0427-00	TRANSISTOR Q1220.....	1
980	PAFZZ	80009	151-0453-00	TRANSISTOR Q1723, Q1724.....	2
990	PAFZZ	80009	151-0432-00	TRANSISTOR Q1722.....	1
1010	PAFZZ	80009	151-0188-00	TRANSISTOR Q1720.....	1
1020	PAFZZ	80131	2N3904	TRANSISTOR Q1701, Q1725, Q1800.....	3
1030	PAFZZ	80131	2N3565	TRANSISTOR Q1700.....	1
1050	PAFZZ	81349	JAN2N2907A	TRANSISTOR Q1500.....	1
1060	PAFZZ	81349	JAN2N2222A	TRANSISTOR Q1301, Q1400, Q1721.....	3

## NATIONAL STOCK NUMBER AND PART NUMBER INDEX

STOCK NUMBER	NATIONAL STOCK NUMBER INDEX				
	FIG.	ITEM	STOCK NUMBER	FIG.	ITEM
5935-00-001-7558	1	110	5905-00-119-8811	4	480
5920-00-010-6652	4	230	5905-00-119-8812	3	420
5950-00-078-1510	3	710		4	400
	4	950	5905-00-120-9154	2	30
5910-00-098-9281	4	100		4	680
5905-00-104-8362	3	460	5905-00-121-9932	3	250
	4	620		4	460
5905-00-104-8363	3	330	5905-00-126-6696	3	500
	4	390	5905-00-131-1255	3	310
5905-00-104-8368	3	530		4	630
	4	430	5905-00-131-9729	3	290
5905-00-104-8369	3	470		4	500
	4	560	5905-00-135-3973	3	300
5905-00-104-8370	3	490		4	380
5961-00-105-7681	3	690	5905-00-135-6046	3	480
	4	930	5905-00-136-8405	3	550
5905-00-105-7767	3	280		4	610
	4	510	5905-00-136-8431	3	260
5905-00-105-7768	3	320		4	530
	4	410	5905-00-138-1285	3	590
5905-00-106-1248	3	410		4	740
	4	600	5905-00-141-0742	4	540
5905-00-106-1249	3	340	5905-00-141-0744	4	700
	4	470	5905-00-141-1183	3	360
5905-00-106-1278	4	360		4	420
5905-00-106-1356	4	640	5905-00-200-9588	3	570
5905-00-106-3666	3	440		4	780
	4	670	5310-00-231-4954	1	260
5905-00-106-9357	3	390	5961-00-246-2427	3	720
5905-00-108-4905	3	600	5920-00-280-8344	4	240
	4	830	6625-00-336-7873	1	240
5905-00-110-7620	3	370	5905-00-346-8113	4	820
	4	440	5935-00-359-8926	1	200
5905-00-111-1679	4	450	5905-00-369-6931	4	550
5905-00-111-4727	4	690	5962-00-417-1080	4	310
5905-00-111-4750	3	430	5905-00-426-7120	3	580
5905-00-114-0708	3	540		4	730
	4	710	5905-00-435-1718	3	510
5905-00-114-0710	3	380		4	570
5905-00-114-0711	3	350	5910-00-445-3272	4	160
	4	490	5905-00-445-3709	4	840
5905-00-114-5339	3	270	5910-00-472-6324	4	120
	4	520	5905-00-481-1328	4	810
5905-00-115-8055	4	650	5325-00-485-0266	1	170
5905-00-116-2394	3	520	5961-00-485-8783	4	960
5905-00-116-8555	4	660	3010-00-498-7454	1	160
5905-00-119-3503	4	590	5999-00-551-9432	1	130
5905-00-119-3504	4	370	5961-00-551-9442	3	750
5905-00-119-8768	4	580		4	970
5905-00-119-8811	3	450	5935-00-597-5054	1	190

## NATIONAL STOCK NUMBER AND PART NUMBER INDEX

STOCK NUMBER	NATIONAL STOCK NUMBER INDEX				
	FIG.	ITEM	STOCK NUMBER	FIG.	ITEM
5905-00-758-3115	4	750	5961-01-063-9256	4	980
5910-00-787-5261	4	190	5935-01-066-0860	1	410
5950-00-790-3703	4	200	5935-01-067-1246	1	370
5940-00-814-1982	1	450	5962-01-073-8508	4	300
5910-00-879-6852	4	130	5999-01-074-8807	4	210
5305-00-889-3116	1	320	5930-01-074-8825	1	20
5310-00-891-3230	1	470	5340-01-075-8402	1	230
5961-00-892-8706	4	1020	5355-01-076-5008	1	210
5961-00-908-7598	3	670	5905-01-077-9703	3	630
5961-00-925-3777	4	1050		4	900
5961-00-930-5325	3	730	5961-01-078-3606	4	990
	4	1030	5935-01-081-0156	1	400
5961-00-943-4084	3	680	5962-01-082-9854	3	160
	4	910	5310-01-083-6377	1	460
5961-00-951-8757	4	1060	5930-01-084-0642	1	440
5305-00-993-0191	1	350	5962-01-084-6425	3	130
5305-01-006-8957	1	300	5975-01-084-9116	1	280
5935-01-012-8987	1	100	5910-01-086-6378	3	90
5999-01-013-3837	3	100		4	150
	4	220	6625-01-087-6577	1	10
6625-01-014-3446	3	120	5962-01-088-3862	3	220
5962-01-021-4808	3	150	5910-01-092-9390	4	180
5962-01-026-2491	3	180	5305-01-102-1845	1	340
5910-01-026-6317	3	30	5930-01-112-5639	3	240
	4	30		4	340
5360-01-029-2164	1	430	5910-01-114-9806	3	40
5935-01-030-1876	1	80		4	20
5935-01-030-3001	1	90	5999-01-120-9271	1	140
5935-01-030-3008	1	70		1	150
5962-01-031-7030	3	190	5962-01-122-0908	3	170
	4	270	5905-01-123-9708	4	860
5935-01-032-5408	2	10	5910-01-123-9845	3	80
5905-01-038-6291	4	790		4	50
5945-01-039-3481	4	350	5935-01-123-9865	1	380
5940-01-039-4185	3	700	5935-01-126-8185	1	360
5961-01-045-0007	3	740	5999-01-127-3667	1	120
5905-01-050-7417	3	560	5962-01-127-8032	4	260
	4	770	5962-01-128-2844	4	280
5905-01-051-7996	4	880	5961-01-129-5043	3	650
5962-01-054-1412	3	140		4	920
5355-01-055-4454	1	220	5905-01-138-6236	3	610
5910-01-062-0508	3	10		4	720
	4	140	5920-01-143-4547	1	180
5910-01-062-0509	3	60	5962-01-146-4291	4	320
	4	60	5935-01-147-3755	1	60
5910-01-062-0511	3	70	5961-01-151-4693	2	40
	4	70	5305-01-156-3734	1	290
5910-01-062-1968	3	20			
	4	40	5962-01-157-4507	3	210
5910-01-062-1970	4	80	5305-01-158-6229	1	330

## NATIONAL STOCK NUMBER AND PART NUMBER INDEX

STOCK NUMBER	NATIONAL STOCK NUMBER INDEX		STOCK NUMBER	FIG.	ITEM
	FIG.	ITEM			
5310-01-172-5574	1	250			
5961-01-176-1729	4	1010			
5962-01-177-4584	3	200			
	4	250			
5961-01-181-7427	4	940			
5962-01-182-1806	4	290			
5962-01-183-9748	3	230			
	4	330			
5905-01-186-6849	4	850			
5910-01-191-9817	4	90			
6625-01-193-0115	1	270			
5905-01-193-5415	3	620			
5962-01-201-1756	2	20			
5961-01-201-6592	3	760			
5910-01-214-1044	3	50			
6695-01-218-1777	1	40			
6695-01-225-4467	1	50			

## NATIONAL STOCK NUMBER AND PART NUMBER INDEX

## PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
084684	AL1256-86	5310-00-891-3230	1	470
29436	CA3120-4	5999-01-074-8807	4	210
81349	CCR06CG102GS	5910-01-214-1044	3	50
15818	CD8220	5961-00-105-7681	3	690
			4	930
73803	CS9002-8	5935-01-066-0860	1	410
03508	DE140	5961-01-129-5043	3	650
			4	920
49671	DF137A	5310-01-083-6377	1	460
81349	F02A250V1/2A	5923-00-280-8344	4	240
81349	F02A250V3A	5920-00-010-6652	4	230
81349	JAN2N2222A	5961-00-951-8757	4	1060
81349	JAN2N2907A	5961-00-925-3777	4	1050
96906	MS35206-212	5305-00-993-0191	1	350
81349	M38510/06003BEB	5962-01-082-9854	3	160
81349	M38510/06101BEB	5962-01-084-6425	3	130
81349	M38510/07009BEB	5962-01-026-2491	3	180
81349	M38510/10201BCB	5962-00-417-1080	4	310
81349	M38510/11201BCB	5962-01-088-3862	3	220
81349	M38510/30001BCB	5962-01-031-7030	3	190
			4	270
81349	M39014/05-2237	5910-00-098-9281	4	100
81349	RCR07G101JS	5905-00-141-1183	3	360
			4	420
81349	RCR07G102JS	5905-00-110-7620	3	370
			4	440
81349	RCR07G103JS	5905-00-106-3666	3	440
			4	670
81349	RCR07G111JS	5905-00-369-6931	4	550
81349	RCR07G121JS	5905-00-119-8812	3	420
			4	400
81349	RCR07G122JS	5905-00-131-1255	3	310
			4	630
81349	RCR07G123JS	5905-00-106-1278	4	360
81349	RCR07G131JS	5905-00-136-8405	3	550
			4	610
81349	RCR07G132JS	5905-00-104-8362	3	460
			4	620
81349	RCR07G151JS	5905-00-119-8811	3	450
			4	480
81349	RCR07G152JS	5905-00-106-1356	4	640
81349	RCR07G153JS	5905-00-116-8555	4	660
81349	RCR07G154JS	5905-00-114-5339	3	270
			4	520
81349	RCR07G162JS	5905-00-106-1248	3	410
			4	600
81349	RCR07G181JS	5905-00-141-0742	4	540
81349	RCR07G202JS	5905-00-114-0708	3	540
			4	710
81349	RCR07G221JS	5905-00-135-3973	3	300
			4	380



## NATIONAL STOCK NUMBER AND PART NUMBER INDEX

## PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
81349	RCR07G241JS	5905-00-435-1718	3	510
			4	570
81349	RCR07G271JS	5905-00-119-3503	4	590
81349	RCR07G272JS	5905-00-111-4727	4	690
81349	RCR07G273JS	5905-00-119-3504	4	370
81349	RCR07G301JS	5905-00-111-4750	3	430
81349	RCR07G302JS	5905-00-131-9729	3	290
			4	500
81349	RCR07G331JS	5905-00-114-0710	3	380
81349	RCR07G361JS	5905-00-104-8370	3	490
81349	RCR07G362JS	5905-00-104-8369	3	470
			4	560
81349	RCR07G391JS	5905-00-121-9932	3	250
			4	460
81349	RCR07G393JS	5905-00-115-8055	4	650
81349	RCR07G432JS	5905-00-136-8431	3	260
			4	530
81349	RCR07G470JS	5905-00-104-8368	3	530
			4	430
81349	RCR07G471JS	5905-00-120-9154	2	30
			4	680
81349	RCR07G472JS	5905-00-114-0711	3	350
			4	490
81349	RCR07G474JS	5905-00-105-7767	3	280
			4	510
81349	RCR07G510JS	5905-00-106-1249	3	340
			4	470
81349	RCR07G511JS	5905-00-116-2394	3	520
81349	RCR07G512JS	5905-00-111-1679	4	450
81349	RCR07G561JS	5905-00-105-7768	3	320
			4	410
81349	RCR07G562JS	5905-00-141-0744	4	700
81349	RCR07G680JS	5905-01-138-6236	3	610
			4	720
81349	RCR07G681JS	5905-00-135-6046	3	480
81349	RCR07G750JS	5905-00-106-9357	3	390
81349	RCR07G751JS	5905-00-126-6696	3	500
81349	RCR07G820JS	5905-00-104-8363	3	330
			4	390
81349	RCR07G821JS	5905-00-119-8768	4	580
81349	RNC55H1004FS	5905-00-108-4905	3	600
			4	830
81349	RNC55K1210FS	5905-00-481-1328	4	810
81349	RNC55K2003FS	5905-00-758-3115	4	750
81349	RPC55K2493FS	5905-00-200-9588	3	570
			4	780
81349	RNC55K8063FS	5905-01-050-7417	3	560
			4	770
81349	RNC55K8451FS	5905-00-346-8113	4	820
81349	RNC56K4991FS	5905-01-038-6291	4	790
81349	RNC60K1211FS	5905-00-426-7120	3	580

## NATIONAL STOCK NUMBER AND PART NUMBER INDEX

## PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
81349	RNC60K1211FS	5905-00-426-7120	4	730
81349	RNC60K2001FS	5905-00-138-1285	3	590
			4	740
81349	RWR80SR301FS	5905-01-186-6849	4	850
07707	SE25	5325-00-485-0266	1	170
34148	5036228	5961-01-045-0007	3	740
56289	VL1770	5910-00-445-3272	4	160
75915	102071	5923-01-143-4547	1	180
80009	105-0718-01	6625-01-087-6577	1	10
80009	105-0719-00	5343-01-075-8402	1	230
80009	108-0422-00	5953-00-790-3703	4	200
80009	120-0382-00	5953-00-078-1510	3	710
			4	950
80009	131-0787-00	5999-00-551-9432	1	130
80009	131-0955-00	5935-00-001-7558	1	110
80009	131-1343-00	5999-01-127-3667	1	120
80009	136-0252-07	5997-01-120-9271	1	150
80009	136-0260-02	5935-01-067-1246	1	370
80009	136-0269-02	5935-01-081-0156	1	400
80009	136-0387-00	5935-00-359-8926	1	200
80009	136-0499-10	5935-01-012-8987	1	100
80009	136-0623-00	5935-01-123-9865	1	380
80009	136-0670-00	5935-01-126-8185	1	360
80009	148-0076-00	5945-01-039-3481	4	350
80009	150-1036-00	5961-01-151-4693	2	40
80009	151-0188-00	5961-01-176-1729	4	1010
80009	151-0427-00	5961-00-551-9442	3	750
			4	970
80009	151-0432-00	5961-01-078-3606	4	990
80009	151-0453-00	5961-01-063-9256	4	980
80009	151-0462-00	5961-01-201-6592	3	760
80009	152-0075-00	5961-00-908-7598	3	670
80009	152-0149-00	5961-01-181-7427	4	940
80009	156-0285-00	5962-01-073-8508	4	300
80009	156-0369-00	5962-01-177-4584	3	200
			4	250
80009	156-0383-02	5962-01-127-8032	4	260
80009	156-0385-02	5962-01-128-2844	4	280
80009	156-0472-03	5962-01-122-0908	3	170
80009	156-1149-00	5962-01-183-9748	3	230
			4	330
80009	156-1161-00	5962-01-182-1806	4	290
80009	175-1178-00	6625-00-336-7873	1	240
74970	187-0106-005	5910-00-787-5261	4	190
80131	2N3565	5961-00-930-5325	3	730
			4	1030
80131	2N3904	5961-00-892-8706	4	1020
80131	2N4249	5961-00-246-2427	3	720
81413	200803-001	5961-00-485-8783	4	960
80009	210-0255-00	5940-00-814-1982	1	450
80009	210-0551-00	5310-01-172-5574	1	250

## NATIONAL STOCK NUMBER AND PART NUMBER INDEX

## PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
80009	210-0583-00	5310-00-231-4954	1	260
80009	211-0008-00	5305-00-889-3116	1	320
83385	211-0012-00	5305-01-006-8957	1	300
80009	211-0097-00	5305-01-156-3734	1	290
80009	211-0101-00	5305-01-158-6229	1	330
80009	211-0244-00	5305-01-102-1845	1	340
80009	214-1061-00	5360-01-029-2164	1	430
80009	263-0010-00	5930-01-112-5639	3	240
			4	340
80009	281-0564-00	5910-00-879-6852	4	130
80009	281-0630-00	5910-00-472-6324	4	120
80009	281-0852-00	5913-01-191-9817	4	90
80009	290-0804-00	5910-01-123-9845	3	80
			4	50
72982	301-000COG470F	5913-01-114-9806	3	40
			4	20
80009	307-0502-00	5905-01-123-9708	4	860
80009	311-1559-00	5905-01-077-9703	3	630
			4	900
80009	315-0200-00	5905-00-445-3709	4	840
80009	343-0495-04	5930-01-084-0642	1	440
80009	343-0499-13	5930-01-074-8825	1	20
80009	352-0161-02	5935-01-030-3001	1	90
80009	352-0165-03	5935-01-030-1876	1	80
80009	352-0166-04	5935-01-147-3755	1	60
80009	352-0166-05	5935-01-030-3008	1	70
80009	352-0169-00	5935-00-597-5054	1	190
80009	366-0494-05	5355-01-055-4454	1	220
80009	366-1512-00	5975-01-084-9116	1	280
80009	366-1690-00	5355-01-076-5008	1	210
72982	374-005COG1389F	5910-01-026-6317	3	30
			4	30
80009	376-0029-00	3013-00-498-7454	1	160
72982	390049X5P0470K	5910-01-062-0511	3	70
			4	70
72982	390049X5P0680K	5919-01-062-0509	3	60
			4	60
22903	4014200-08	5905-01-051-7996	4	880
32997	4308R-101-202	5905-01-193-5415	3	620
07690	438267-01	5962-01-201-1756	2	20
22526	47357	5999-01-013-3837	3	100
			4	220
56289	503D475F035KA	5910-01-086-6378	3	90
			4	150
56289	503D476F016MB	5910-01-092-9390	4	180
97942	581R68H06	5962-01-054-1412	3	140
94033	600A91	5962-01-157-4507	3	210
74063	60104-004	5961-00-943-4084	3	680
			4	910
16331	63A133445P70	5962-01-146-4291	4	320

## NATIONAL STOCK NUMBER AND PART NUMBER INDEX

## PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
22526	65500-136	5935-01-032-5408	2	10
22526	65521-136	5940-01-039-4185	3	700
80009	670-6556-01	6625-01-193-0115	1	270
80009	670-6557-04	6695-01-218-1777	1	40
80009	670-6558-06	6695-01-225-4467	1	50
22526	75060-012	5999 -01-120-9271	1	140
03538	7844958	5962-01-021-4808	3	150
72982	8005H9AABZ5U104M	5910-01-062-1968	3	20
			4	40
72982	8005H9AADW5R103K	5910-01-062-0508	3	10
			4	140
72982	8005H9AADW5R472K	5910-01-062-1970	4	80
28480	8159-0005	6625-01-014-3446	3	120

By Order of the Secretary of the Army:

**JOHN A. WICKHAM, JR.**  
*General, United States Army*  
*Chief of Staff*

Official:

**R. L. DILWORTH**  
*Brigadier General, United States Army*  
*The Adjutant General*

Distribution:

To be distributed in accordance with DA Form 12-34C, Block No. 319, requirements for calibration procedures publications.



This fine document...

Was brought to you by me:



## [Liberated Manuals -- free army and government manuals](#)

Why do I do it? I am tired of sleazy CD-ROM sellers, who take publicly available information, slap “watermarks” and other junk on it, and sell it. Those masters of search engine manipulation make sure that their sites that sell free information, come up first in search engines. They did not create it... They did not even scan it... Why should they get your money? Why are not letting you give those free manuals to your friends?

I am setting this document FREE. This document was made by the US Government and is NOT protected by Copyright. Feel free to share, republish, sell and so on.

I am not asking you for donations, fees or handouts. If you can, please provide a link to [liberatedmanuals.com](http://liberatedmanuals.com), so that free manuals come up first in search engines:

<A HREF=<http://www.liberatedmanuals.com/>>Free Military and Government Manuals</A>

– Sincerely  
Igor Chudov  
<http://igor.chudov.com/>