


Scott... where innovation is a tradition




SERVICE BULLETIN  
FOR  
MODEL 312D

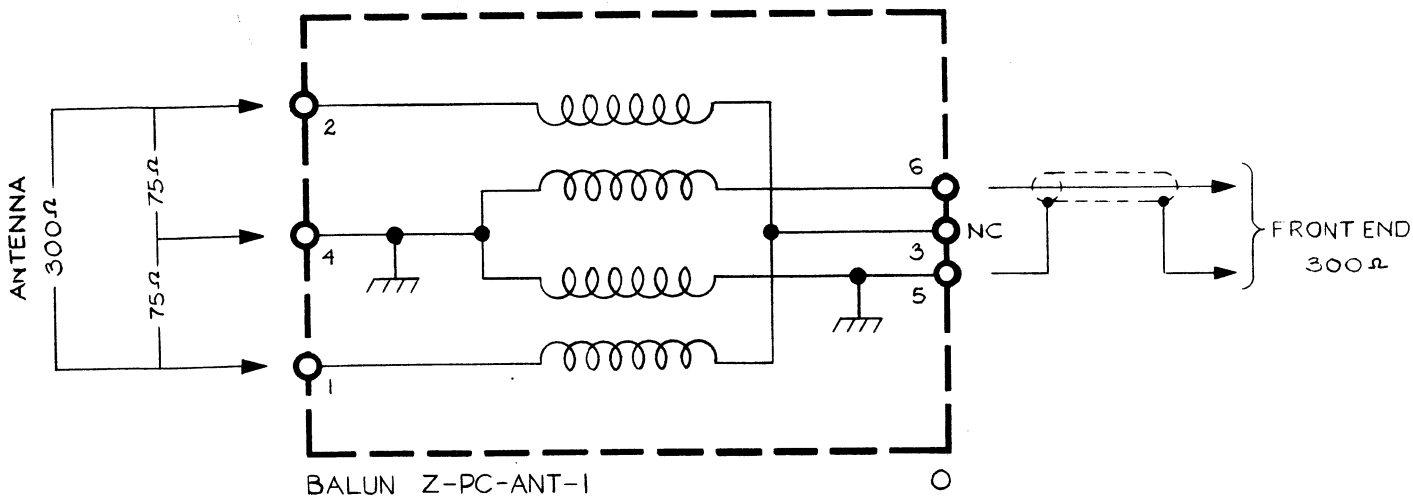

CASCODE RF AMPLIFIER

RF MIXER

RF OSCILLATOR

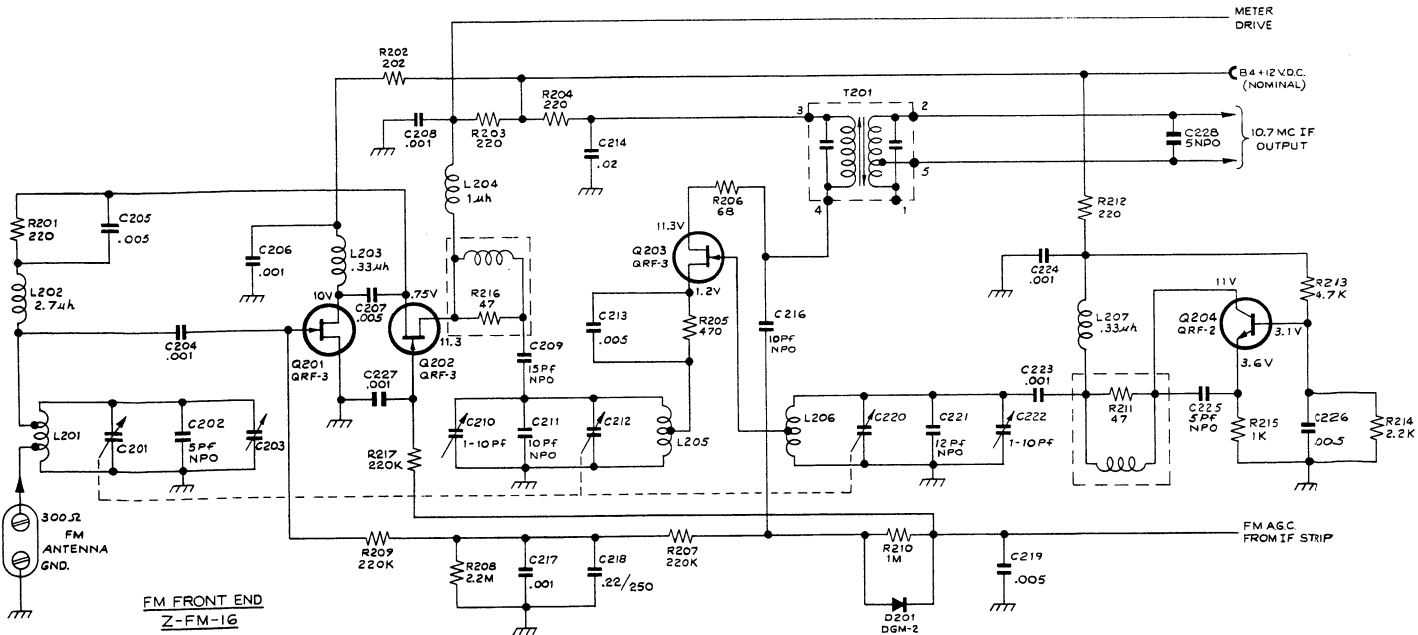

HIGHEST SERIES NO.  
R217  
C226  
L207  
D201  
T201  
Q204

NOTES:


1. UNLESS OTHERWISE SPECIFIED: RESISTANCE IN OHMS  $\pm 10\%$  CAPACITANCE IN MFD'S, RESISTORS  $\frac{1}{4}$  WATT.
2. INDICATED SUPPLY VOLTAGES MAY VARY ABOVE OR BELOW NOMINAL VOLTAGE SHOWN FROM MODEL TO MODEL.
3. D C VOLTAGES  $\pm 15\%$  MEASURED WITH  $20K\Omega/V$  VOM.
4. ARROW-HEADS INDICATE MAIN SIGNAL PATH.

NOTES:


Q201, Q202, Q203 TRANSISTORS ARE SELECTED BY GROUP.

GROUP	Q201	Q202	Q203	APPROX. RELATIVE GAIN
1	YELLOW	GREEN	ORANGE	FREQUENTLY HIGHEST
2	GREEN	BLUE	YELLOW	FREQUENTLY LOWEST
3	ORANGE	YELLOW	RED	FREQUENTLY LOWEST

FET BASE DIAGRAMS

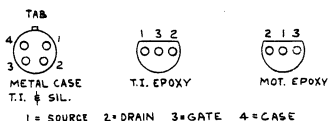


IC301, IC302, IC303, IC304 - Q $\mu$ A-703

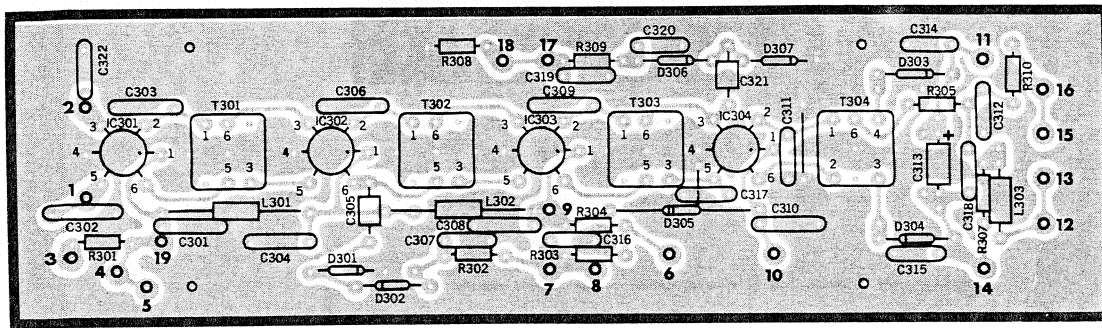

FM IF AMPLIFIER Z-PC-IF-7


3

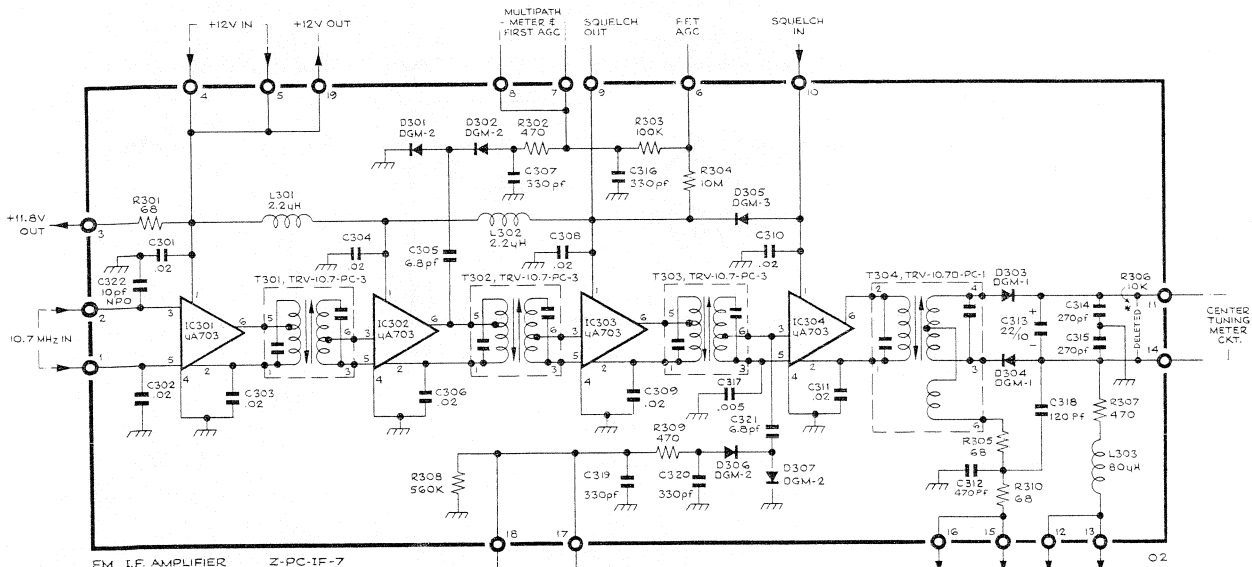

FM IF AMPLIFIER Z-PC-IF-7


- NOTES:
1. UNLESS OTHERWISE SPECIFIED:  
RESISTANCE IN OHMS  $\pm 10\%$ .  
CAPACITANCE IN MFD'S.  
RESISTORS 1/4 WATT.  
VOLTS DC  $\pm 15\%$  MEASURED WITH 20K $\Omega$ /V.V.O.M.
  2. ARROW HEADS INDICATE MAIN SIGNAL PATH.
  3. \* R306, 10K, 1/2 W RESISTOR, DELETED AND REPLACED WITH TWO EXTERNAL 5.2K, 1/4 W RESISTORS.

HIGHEST SERIES NUMBERS  
C 322 D307 R310 L303  
T304 IC304

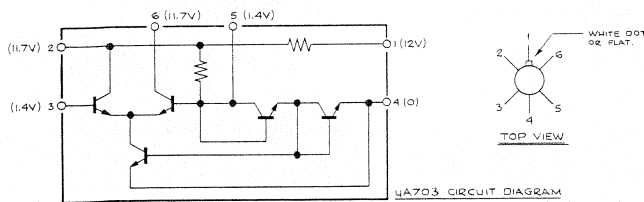

4A703 CIRCUIT DIAGRAM

Q1, Q2-2N2925 or 2N3711 or QA-14

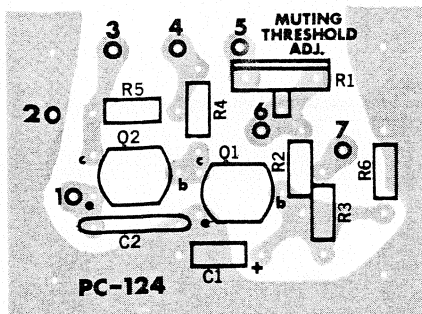


PC-124

MUTING OFF-ON SW

- NOTES:
1. UNLESS OTHERWISE SPECIFIED:  
RESISTANCE IN OHMS  $\pm 10\%$ .  
CAPACITANCE IN MFD'S.  
RESISTORS 1/4 WATT.
  2. ARROW ON POTENTIOMETER INDICATES CW ROTATION.
  3. \* FOR USE WITH EXTERNAL MUTING CONTROL WHEN R1 IS NOT ON BOARD.

HIGHEST SERIES NUMBERS  
Q 1, 2  
R 2, 6  
C 2, 2

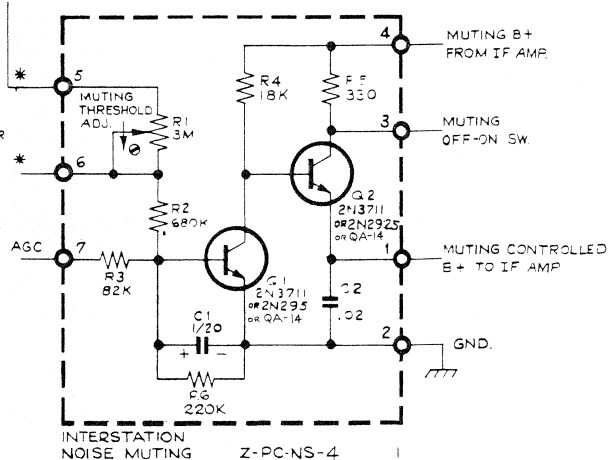


INTERSTATION NOISE MUTING Z-PC-NS-4


INTERSTATION Z-PC-NS-4 NOISE MUTING

1

**Q1 - 2N2924 or QA-14**    **Q2 - SE4010 or QA-15**  
**Q3 - 2N3964, 2N4249 or 2N4250**  
**Q4 - QA-16 or 2N3567**    **Q5 - QA-15**

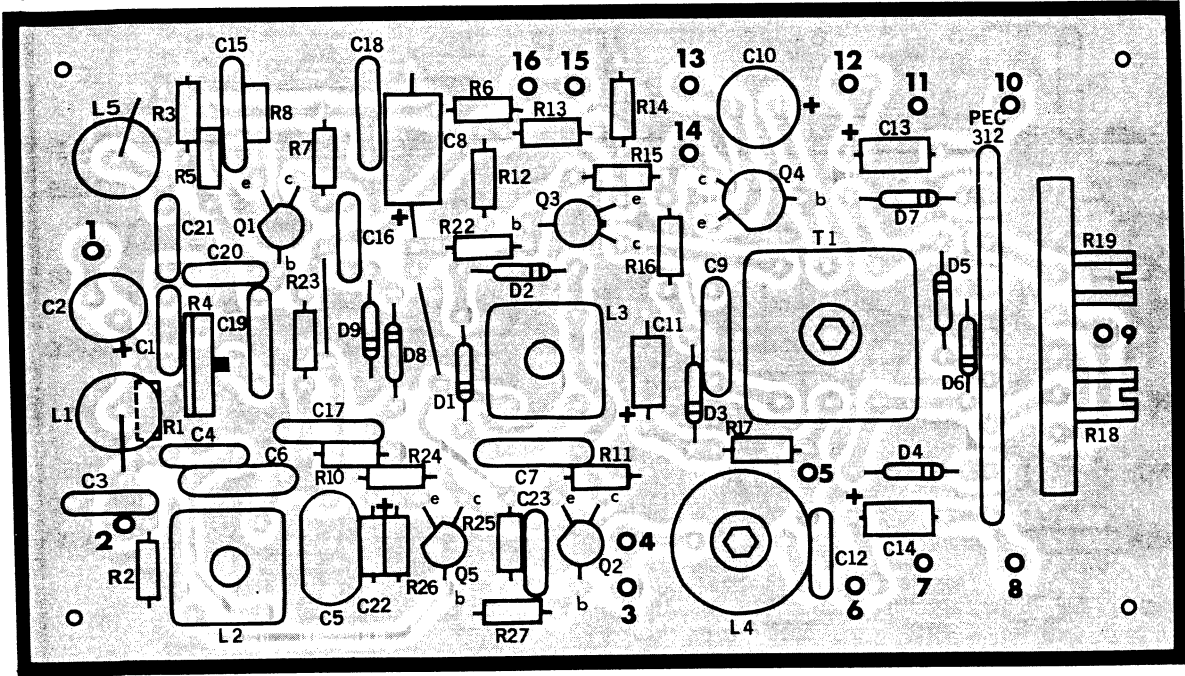

**AUTOMATIC MULTIPLEX DEMODULATOR Z-PC-MX-15**

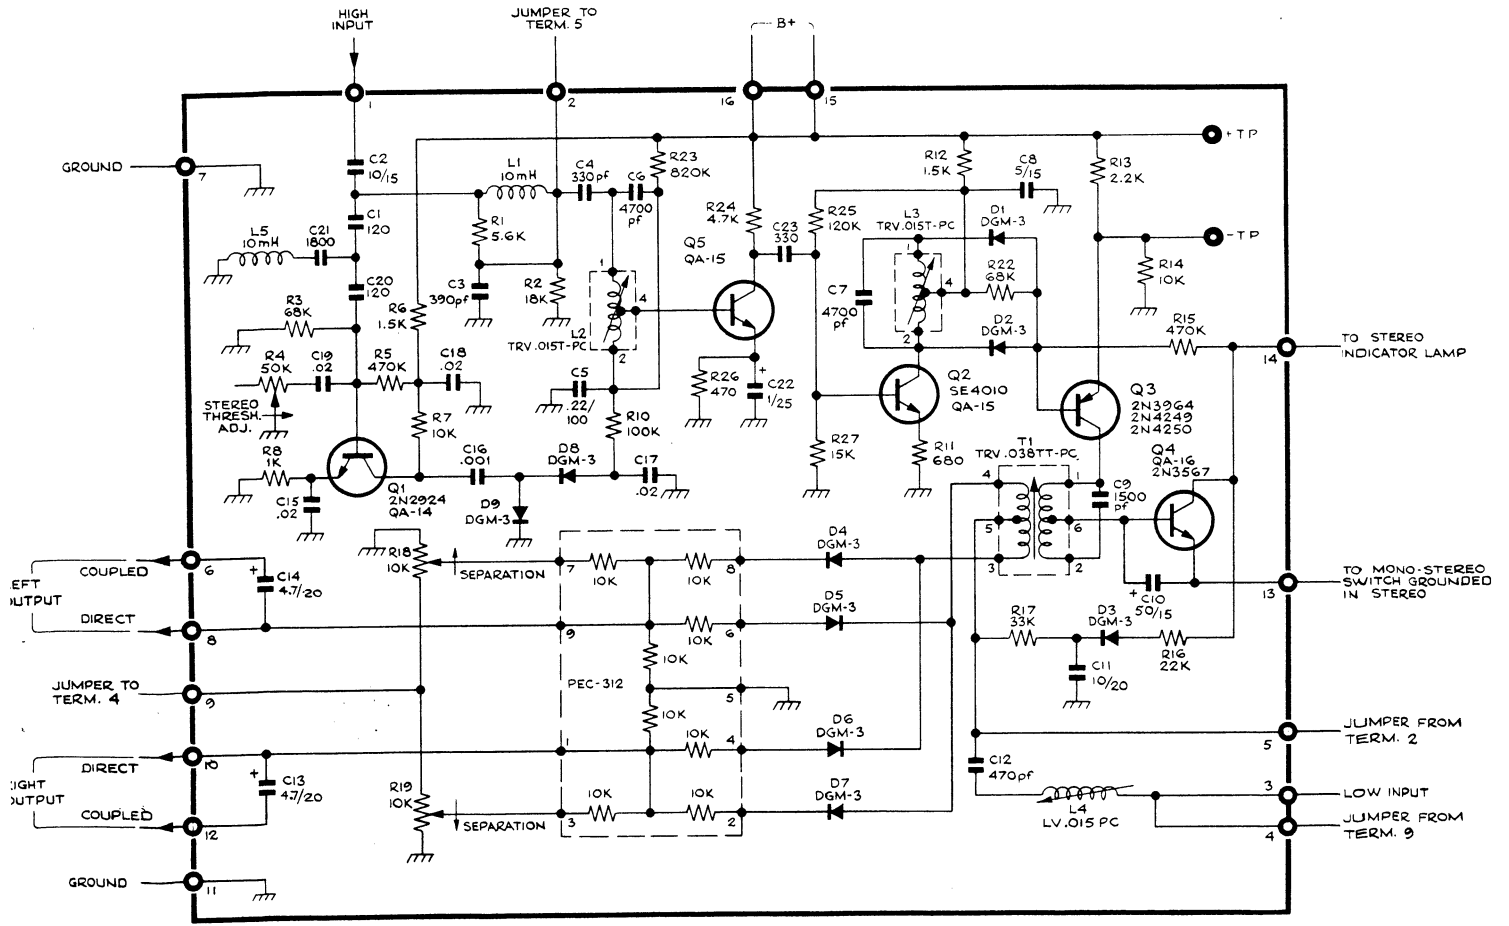

**AUTOMATIC MULTIPLEX DEMODULATOR Z-PC-MX-15**


- NOTES:**
1. UNLESS OTHERWISE SPECIFIED: RESISTANCE IN OHMS  $\pm 10\%$ , CAPACITANCE IN MFD'S, RESISTORS 1/4 WATT.
  2. ARROWS ON POTENTIOMETERS INDICATE CW ROTATION.

Q1, Q101-S1990(FAIRCHILD)

Q4, Q104- 2N3644


Q2, Q102- 2N2925, QA-15

Q3, Q103, Q5, Q105- 2N3567

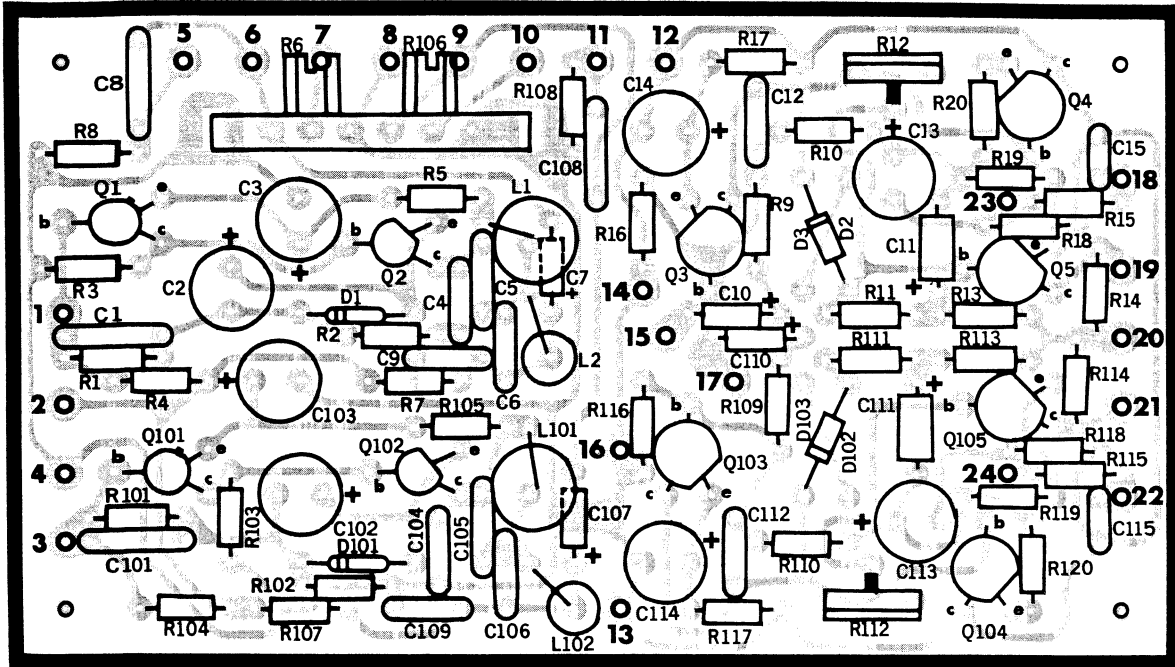

**OUTPUT Z-PC-O-4**


1

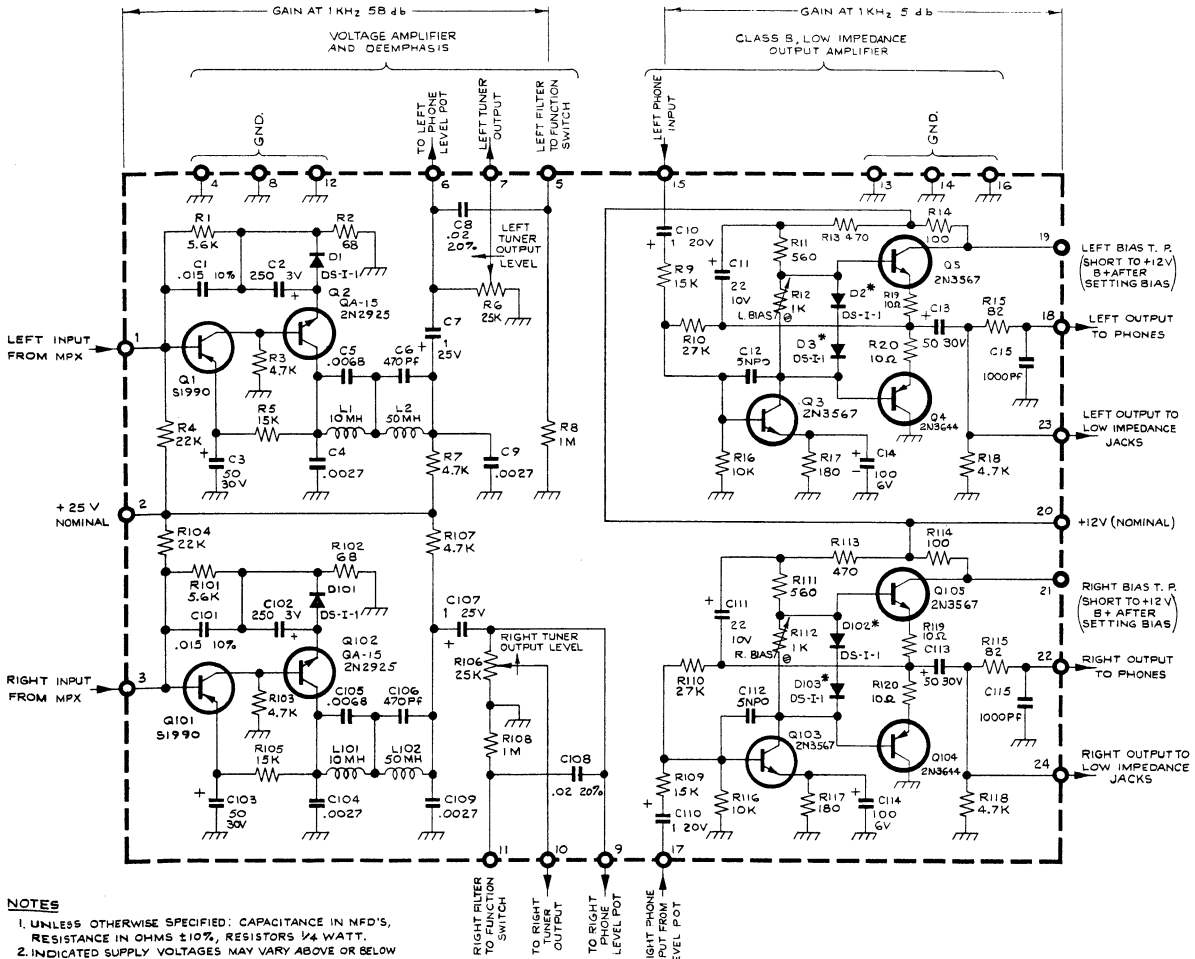

**NOTES**

1. UNLESS OTHERWISE SPECIFIED: CAPACITANCE IN NFD'S, RESISTANCE IN OHMS  $\pm 10\%$ , RESISTORS  $\frac{1}{4}$  WATT.
  2. INDICATED SUPPLY VOLTAGES MAY VARY ABOVE OR BELOW NOMINAL VOLTAGE SHOWN FROM MODEL TO MODEL.
  3. D.C. VOLTAGES  $\pm 15\%$  MEASURED WITH 20K $\Omega$ /V VOM.
  4. ARROW HEADS INDICATE MAIN SIGNAL PATH.
- \* EACH PAIR OF DS-I-1 DIODES, D2, D3 AND D102, D103 MAY BE REPLACED BY ONE DST-2

Q1 - 2N2925 or 2N3711 (QA - 15)

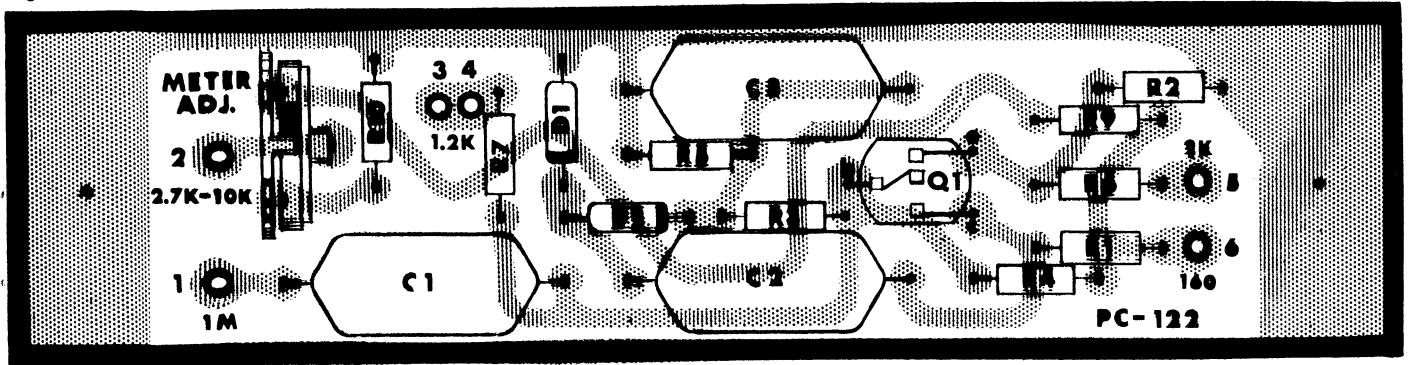

MULTIPATH INDICATOR Z-PC-MI-2


00

NOTES:

1. UNLESS OTHERWISE SPECIFIED:  
RESISTANCE IN OHMS  $\pm 10\%$   
CAPACITANCE IN MFD'S  
RESISTORS  $\frac{1}{4}$  WATT
2. ARROW ON POTENTIOMETER INDICATES CW ROTATION
3. INDICATED SUPPLY VOLTAGES MAY VARY ABOVE OR BELOW NOMINAL VOLTAGE SHOWN FROM MODEL TO MODEL.  
HIGHEST SERIES NUMBERS

C 3  
D 2  
R 1  
R 10


R5 NOT INCLUDED

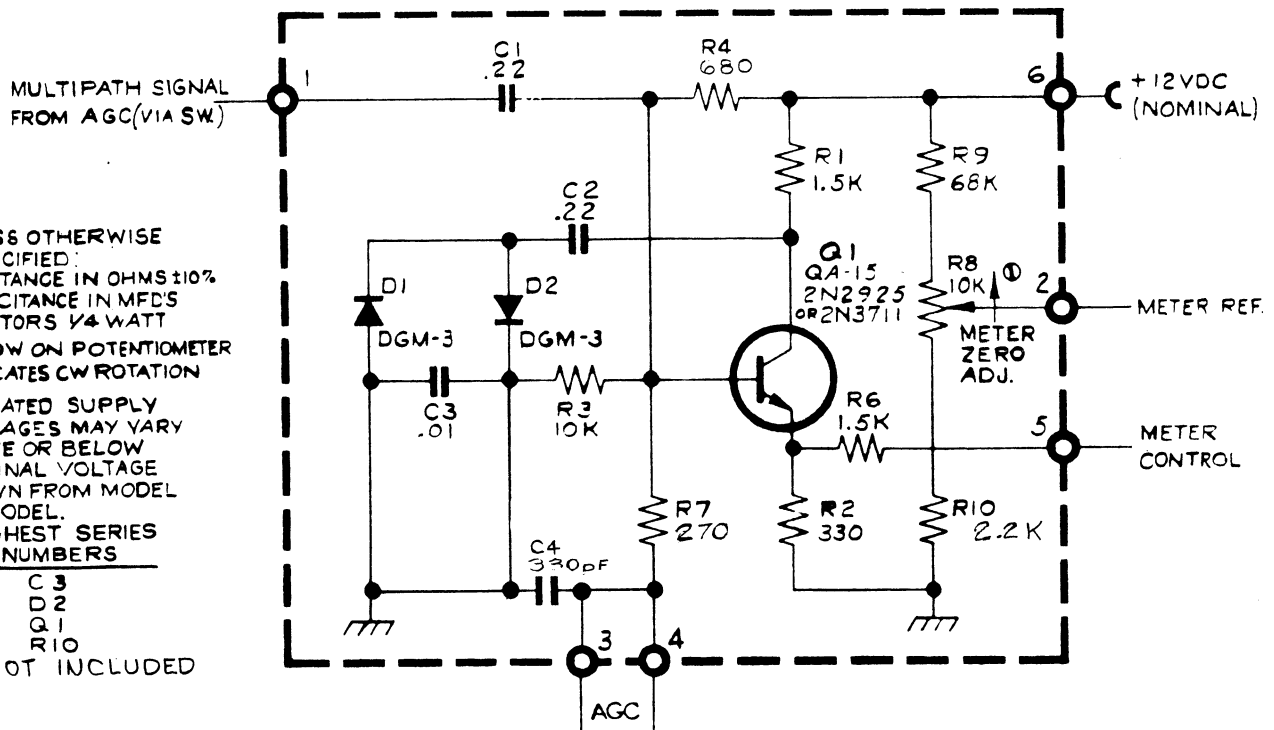

MULTIPATH INDICATOR


Z-PC-MI-2 01

Q401-Q402 - QA - 10

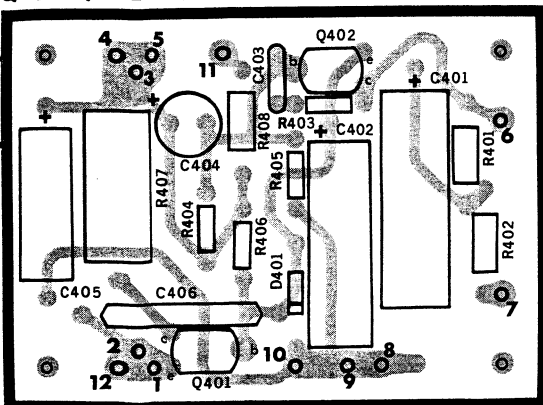

POWER SUPPLY


Z-PC-PS-11 0

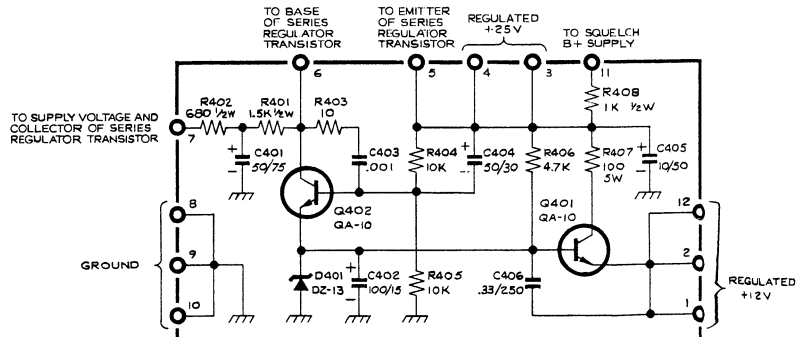

POWER SUPPLY Z-PC-PS-10

NOTES:

1. RESISTANCE IN OHMS  $\pm 10\%$ .  
RESISTORS  $\frac{1}{4}$  WATT.  
CAPACITANCE IN MFD'S.

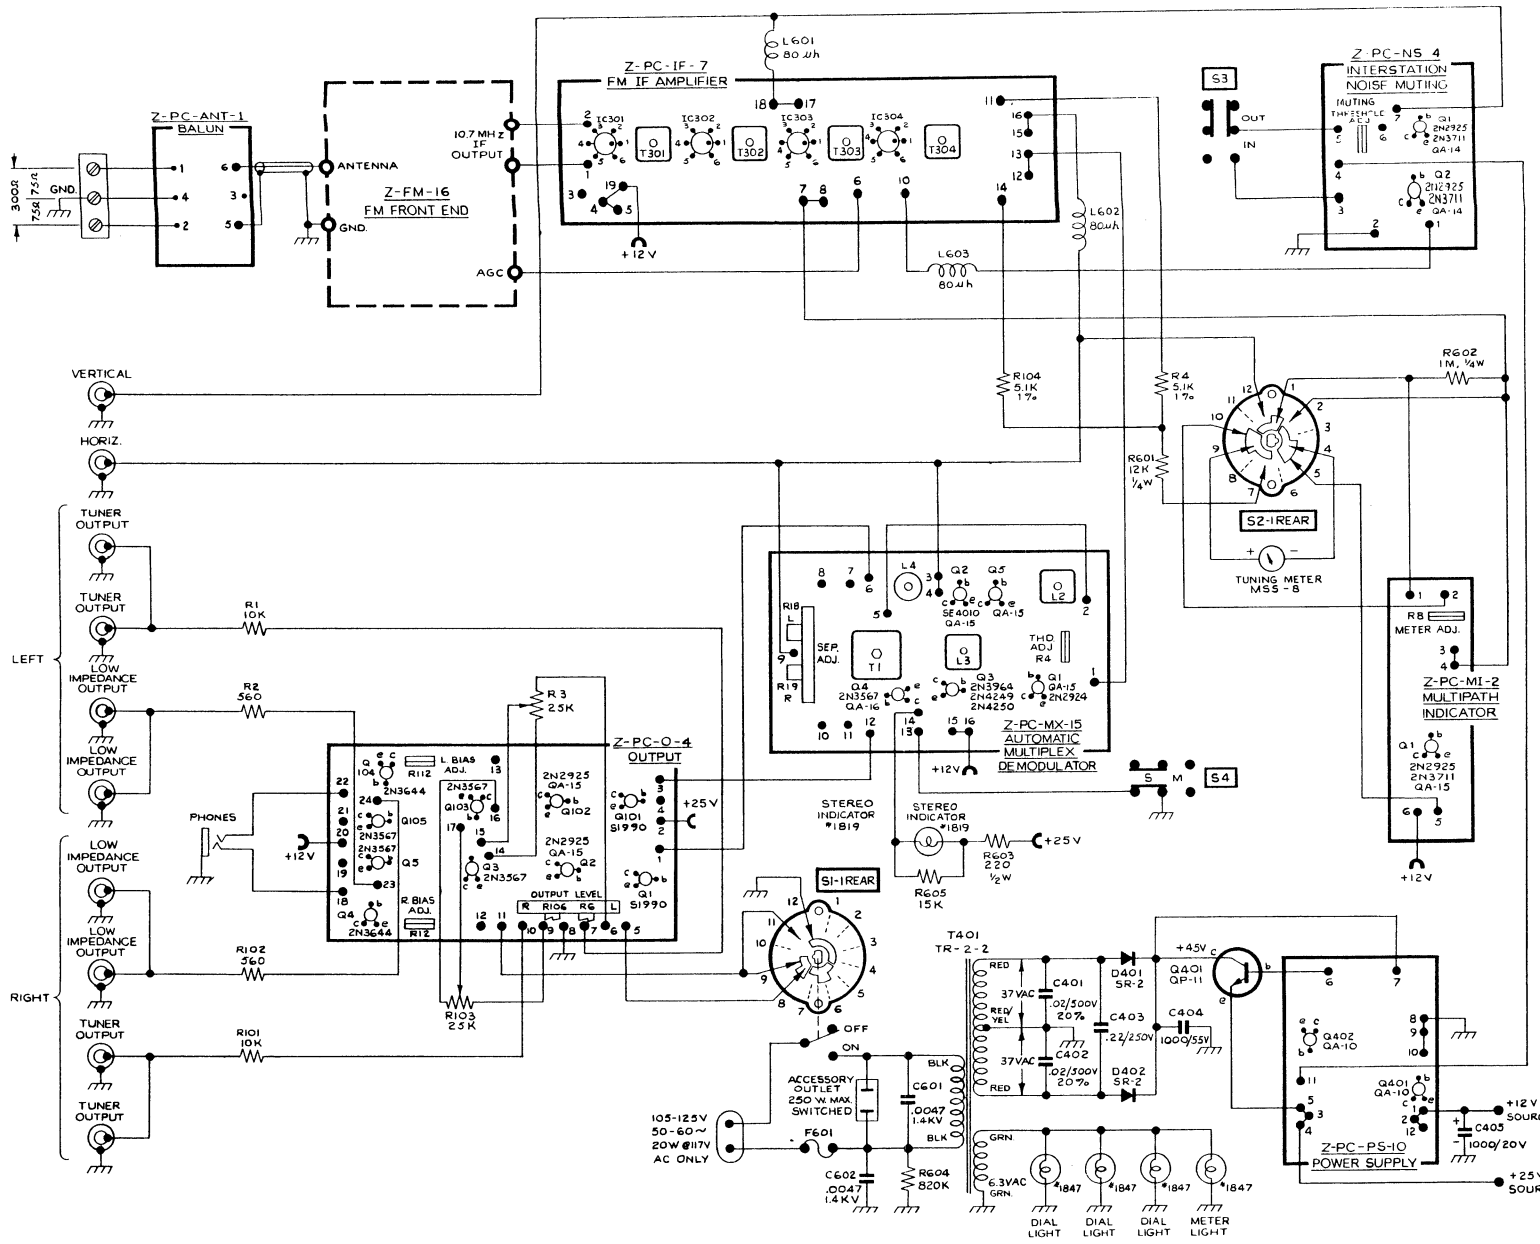

**VOLTAGES**

UNLESS OTHERWISE SPECIFIED, ALL VOLTAGES POSITIVE DC 1/2% MEASURED WITH 20K  $\Omega$  VOM AND 17  $\mu$ AC LINE 300  $\mu$ S LOAD ON ANTENNA TERMINALS, TUNER OF STATION AND FUNCTION SWITCH IN NORMAL POSITION SELECTOR SWITCH IN MONO MUTING OFF, METER SWITCH IN SIGNAL STRENGTH POSITION.

\* VOLTAGES MEASURED UNDER SAME CONDITIONS AS ABOVE, ONLY MODE SWITCH IN MONO WITH MUTING ON.

\*\* VOLTAGES MEASURED UNDER SAME CONDITIONS AS ABOVE, ONLY MODE SWITCH IN STEREO AND MUTING OFF WITH STEREO SIGNAL FED INTO TUNER.

▲ VOLTAGES MEASURED UNDER SAME CONDITIONS AS ABOVE, ONLY WITH CC TVTM.

Z-FM-16	GATE	DRAIN	SOURCE
Q201	.2 V	10 V	0 V
Q202	1.1 V	-.75 V	11.3 V
Q203	0 V	11.3 V	1.2 V
Q204	3.6 V	3.1 V	11.0 V

Z-PC-IF-7	LEAD #	1	2	3	4	5	6
IC301	12V	11.6V	1.6V	0V	1.6V	11.5V	
IC302	12V	11.6V	1.6V	0V	1.6V	11.5V	
IC303	12V	11.6V	1.6V	0V	1.6V	11.5V	
IC304	11V	10.5V	1.5V	0V	1.5V	11V	
IC304	.9V	1V	1V	0V	1V	11V	

Z-PC-NS-4	a	b	c
Q1	1.1V	.35V	2V
Q2	0V	.65V	.3V

Z-PC-MI-2	Q1	1.5V	2.1V	4.6V
Q1	.5V	1.1V	6V	
Q2	.5V	1.1V	10.6V	
Q3	.7V	8V	9V	
Q4	0V	.7V	.3V	
Q5	.5V	1.1V	7V	
Q1	.5V	1.1V	6V	
Q2	.5V	1.1V	10.6V	
Q3	.3V	10.7V	9.8V	
Q4	.7V	0V	27V	
Q5	.5V	1.1V	10.6V	

Z-PC-O-4	Q1	6.5V	6V	1.5V
Q1	Q101	6.5V	6V	1.5V
Q2	Q102	9V	1.5V	11.4V
Q3	Q103	.8V	1.5V	6.5V
Q4	Q104	7V	6.5V	0V
Q5	Q105	7V	7.6V	12V

Z-PC-PS-10	Q401	12.5V	13V	20V
Q401	12.5V	13V	20V	
Q402	13V	13.5V	27V	

POWER TRANSISTOR	Q401	28V	27.5V	45V
Q401	28V	27.5V	45V	

▲ AGC VOLTAGE (Z-PC-IF-7)  
 TERM 6 -.5V TO -1.0V  
 TERM 1B -2V TO -2.5V  
 1,000  $\mu$ V SIGNAL FED TO ANTENNA TERMINALS WITH UNIT OPERATING.

**NOTES:**

- UNLESS OTHERWISE SPECIFIED: RESISTANCE IN OHMS  $\pm$  10%. RESISTORS 1/2 WATT. CAPACITANCE IN PFD'S.
- ROTARY SWITCHES SHOWN IN FULL CCW POSITION AS VIEWED FROM THE FRONT.
- ARROW-HEADS INDICATE MAIN SIGNAL PATH.
- ARROW ON POTENTIOMETER INDICATES CW ROTATION.
- SI-FUNCTION SWITCH (SRV-44-11)  
 POSITION FUNCTION  
 1 OFF  
 2 NORMAL  
 3 SUB CH FILTER  
 4 NOISE FILTER
- S2-METER SWITCH (SRV-33-7)  
 1 SIGNAL STRENGTH  
 2 MULTIPATH  
 3 CENTER TUNING
- SWITCH FUNCTION  
 S1 FUNCTION  
 S2 METER  
 S3 MUTING  
 S4 MODE
- FUSE F601 .5 AMP SLO-8LO

**HIGHEST SERIES NUMBERS**

R4	R104	C403	R605
		D401	C602
		T401	L603
			F601