



Acoustical AMI Tuner in Wide mode



Acoustical AMI tuner in Tune mode

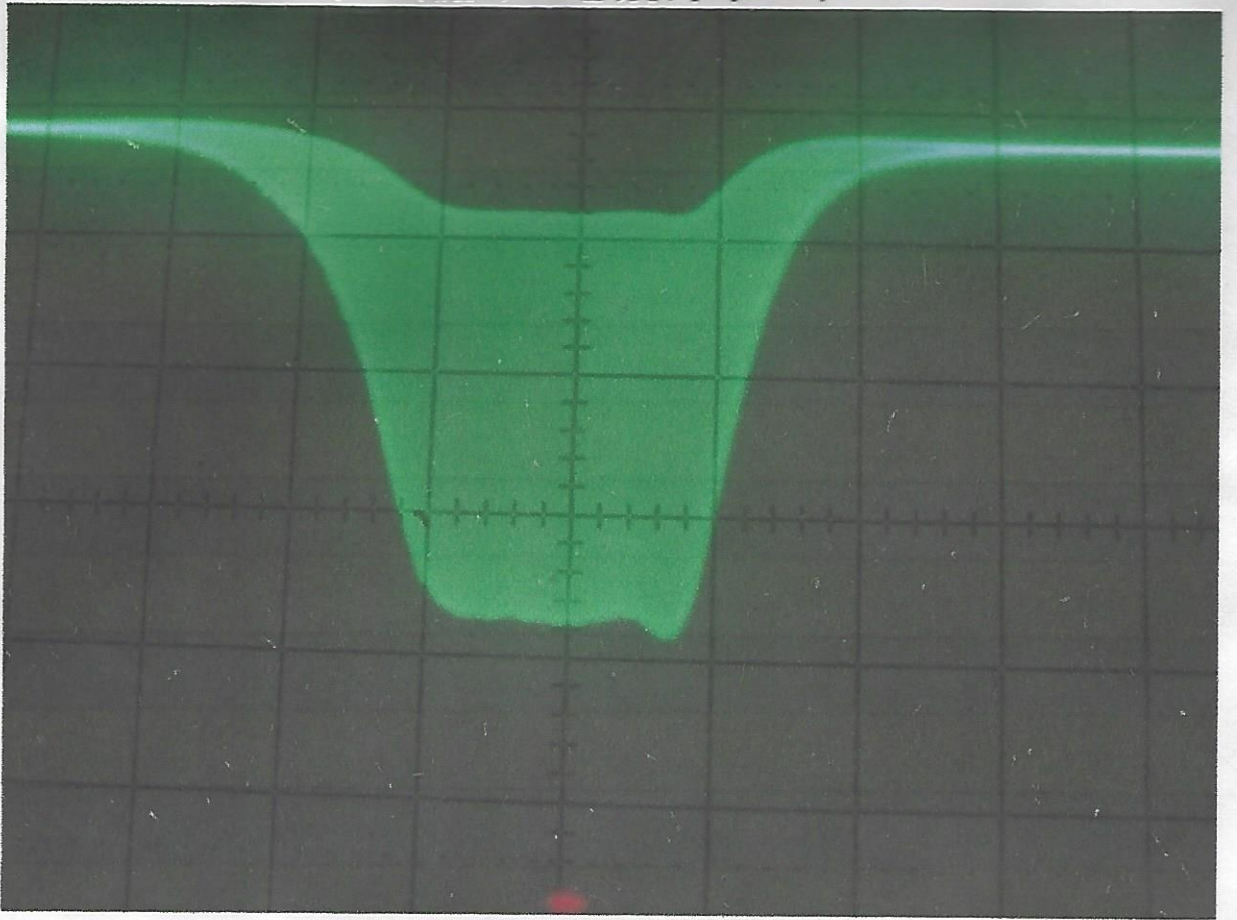

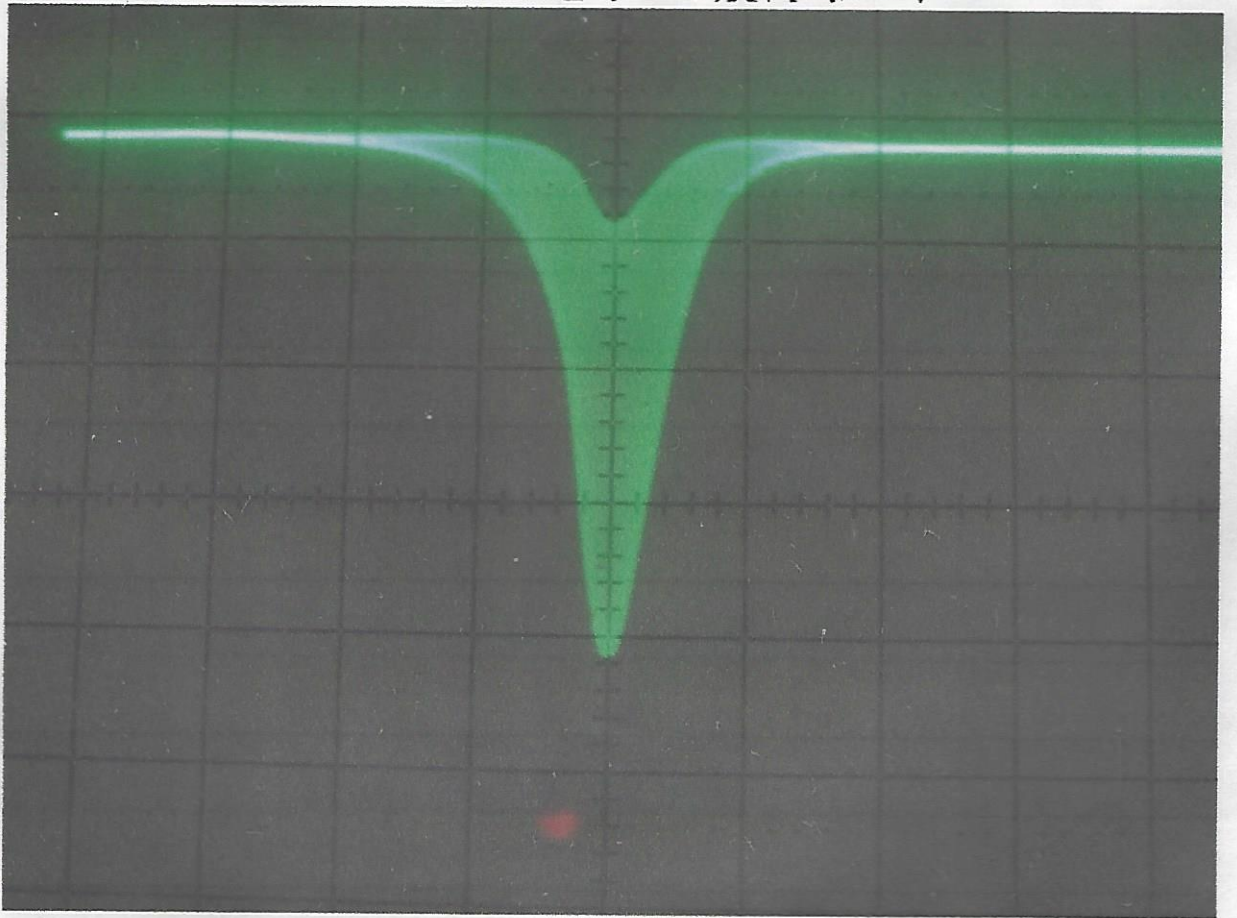

ACOUSTICAL A.M. TUNER COMPONENT LIST

| Component Reference | Value            | Tolerance | Comments                     |
|---------------------|------------------|-----------|------------------------------|
| R1                  | 82               | 10%       | Carbon Film                  |
| R2                  | 470K             | 10%       | Carbon Film                  |
| R3                  | 220              | 10%       | Carbon Film                  |
| R4                  | 4.7K             | 10%       | Carbon Film                  |
| R5                  | 100              | 10%       | Carbon Film                  |
| R6                  | 47K              | 10%       | Carbon Film                  |
| R7                  | 15K              | 10%       | Carbon Film                  |
| R8                  | 2.7K             | 10%       | Carbon Film                  |
| R9                  | 82               | 10%       | Carbon Film                  |
| R10                 | 1.0M             | 10%       | Carbon Film                  |
| R11                 | 1.0M             | 10%       | Carbon Film                  |
| R12                 | 150K             | 10%       | Carbon Film                  |
| R13                 | 4.7K             | 10%       | Carbon Film                  |
| R14                 | 5.0K             | 10%       | 3 watt Wirewound             |
| R15                 | 1.0M             | 10%       | Carbon Film                  |
| R16                 | 1.5M             | 10%       | Carbon Film                  |
| R17                 | 4.7M             | 10%       | Carbon Film                  |
| R18                 | 4.7M             | 10%       | Carbon Film                  |
| R19                 | 220              | 10%       | Carbon Film                  |
| R20                 | 22K              | 10%       | Carbon Film                  |
| R21                 | 22K              | 10%       | Carbon Film                  |
| C1                  | RF Tuning Gang   |           | Part of Tuning Gang Assembly |
| C2                  | Osc. Tuning Gang | 2%        | Part of Tuning Gang Assembly |
| C3                  | 100pf            | 2%        |                              |
| C4                  | 100pf            | 2%        |                              |
| C5                  | RF Trimmer       |           | Part of Tuning Gang Assembly |
| C6                  | .04uf            | 20%       |                              |
| C7                  | 100pf            | 2%        |                              |
| C8                  | Osc. Trimmer     |           | Part of Tuning Gang Assembly |
| C9                  | 25pf             | 2%        |                              |
| C10                 | 200pf            | 2%        |                              |
| C11                 | 100pf            | 2%        |                              |
| C12                 | 650pf            | 2%        |                              |
| C13                 | 100pf            | 2%        |                              |
| C14                 | 400pf            | 5%        |                              |
| C15                 | 2000pf           | 5%        |                              |
| C16                 | 2000pf           | 5%        |                              |
| C17                 | 100pf            | 2%        |                              |
| C18                 | .05uf            | 20%       |                              |
| C19                 | .05uf            | 20%       |                              |
| C20                 | .04uf            | 20%       |                              |
| C21                 | 120pf *          | 2%        | Part of I.F.T.2 (L8)         |
| C22                 | 120pf *          | 2%        | Part of I.F.T.2 (L8)         |
| C23                 | 5pf              | 2%        |                              |
| C24                 | 100pf            | 5%        |                              |
| C25                 | .25uf            | 20%       |                              |
| C26                 | .02uf            | 20%       |                              |

